




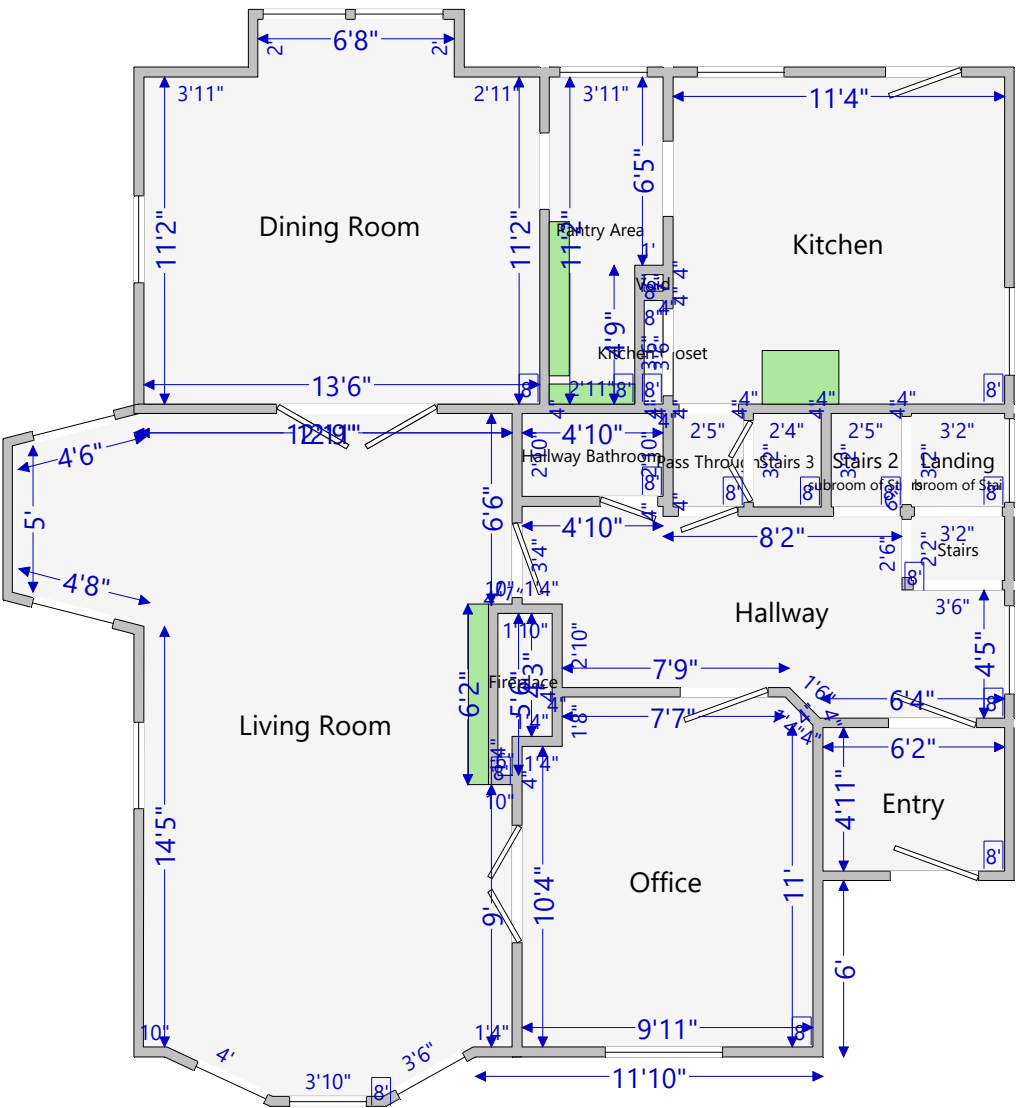

Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

1st floor:






Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

2nd floor 2:

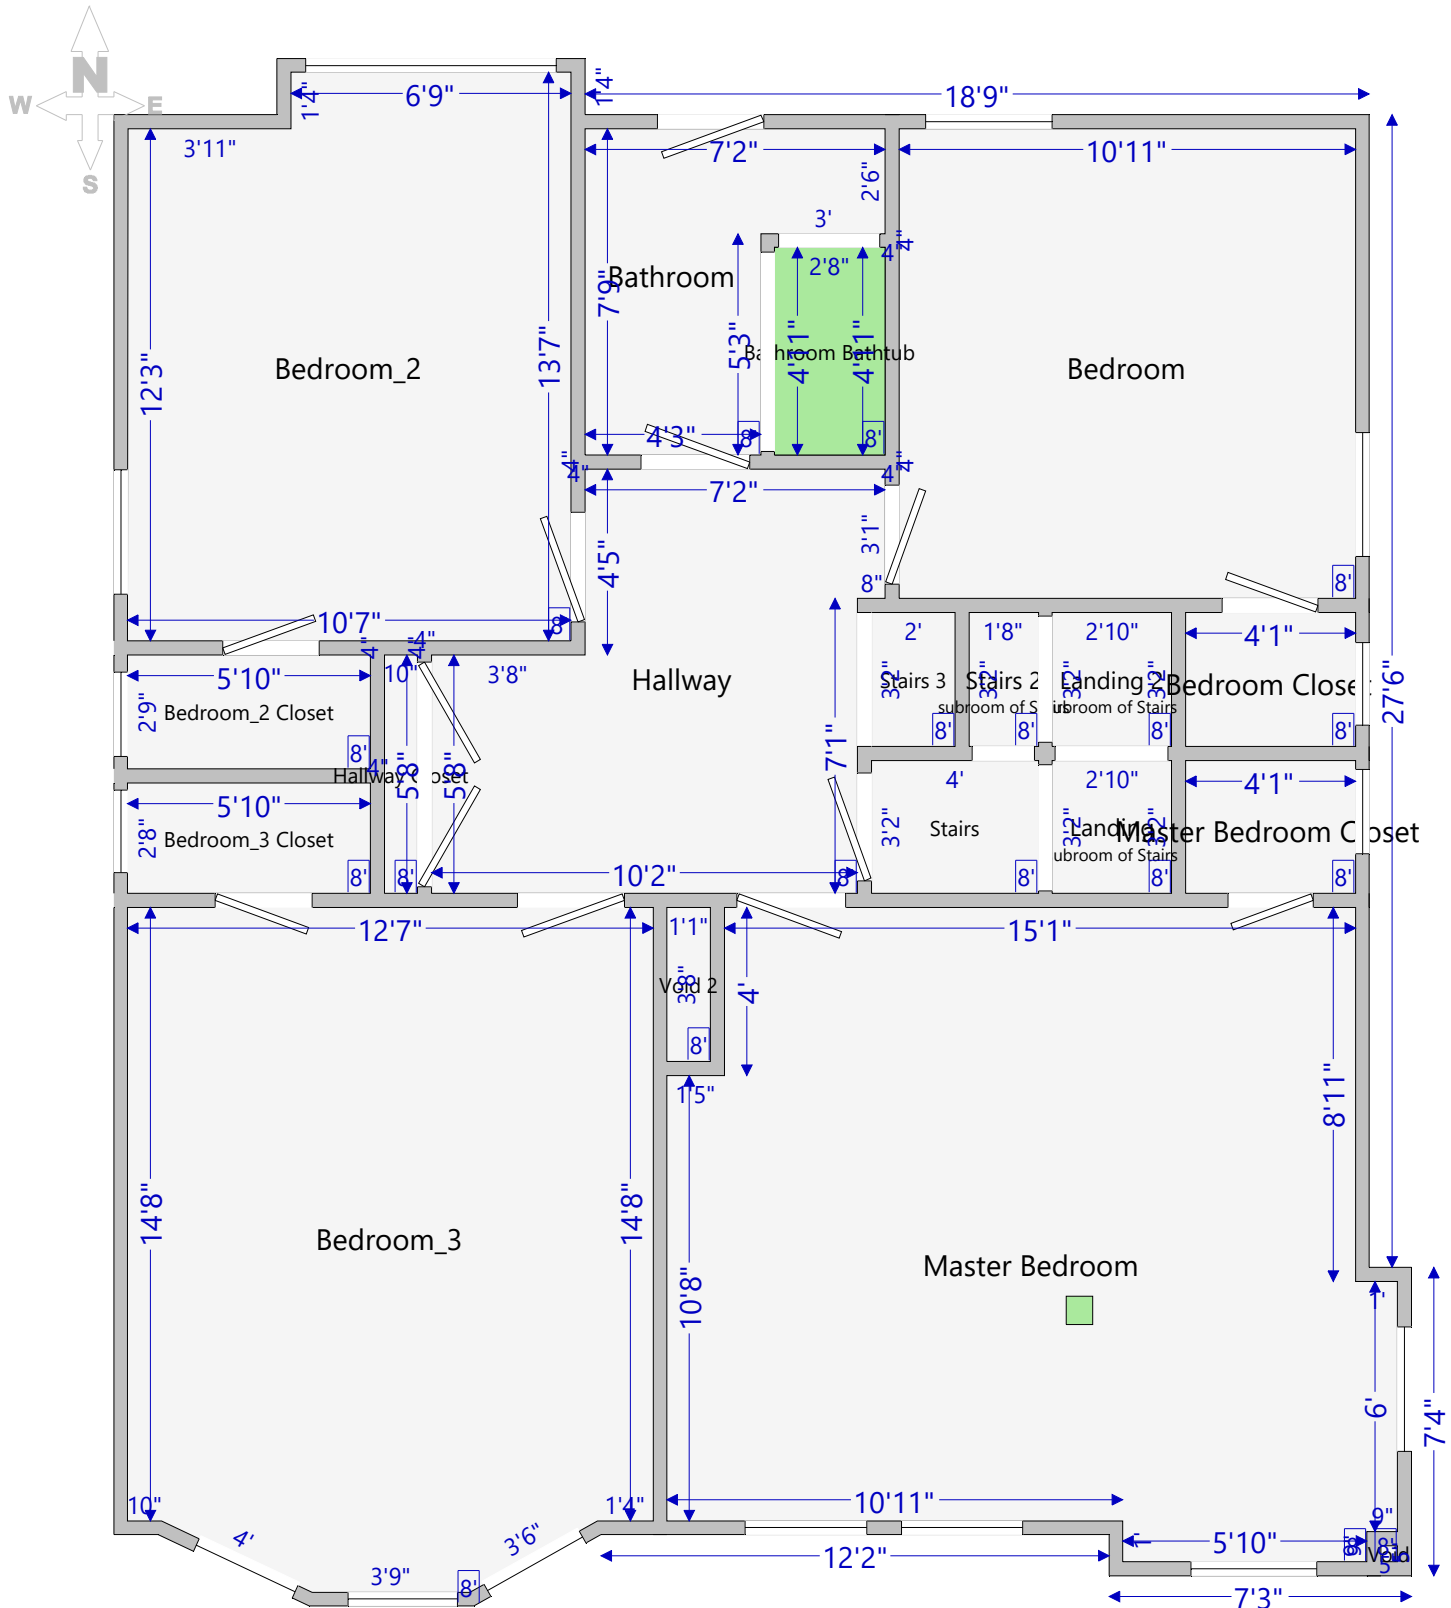




Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

3rd floor 2:

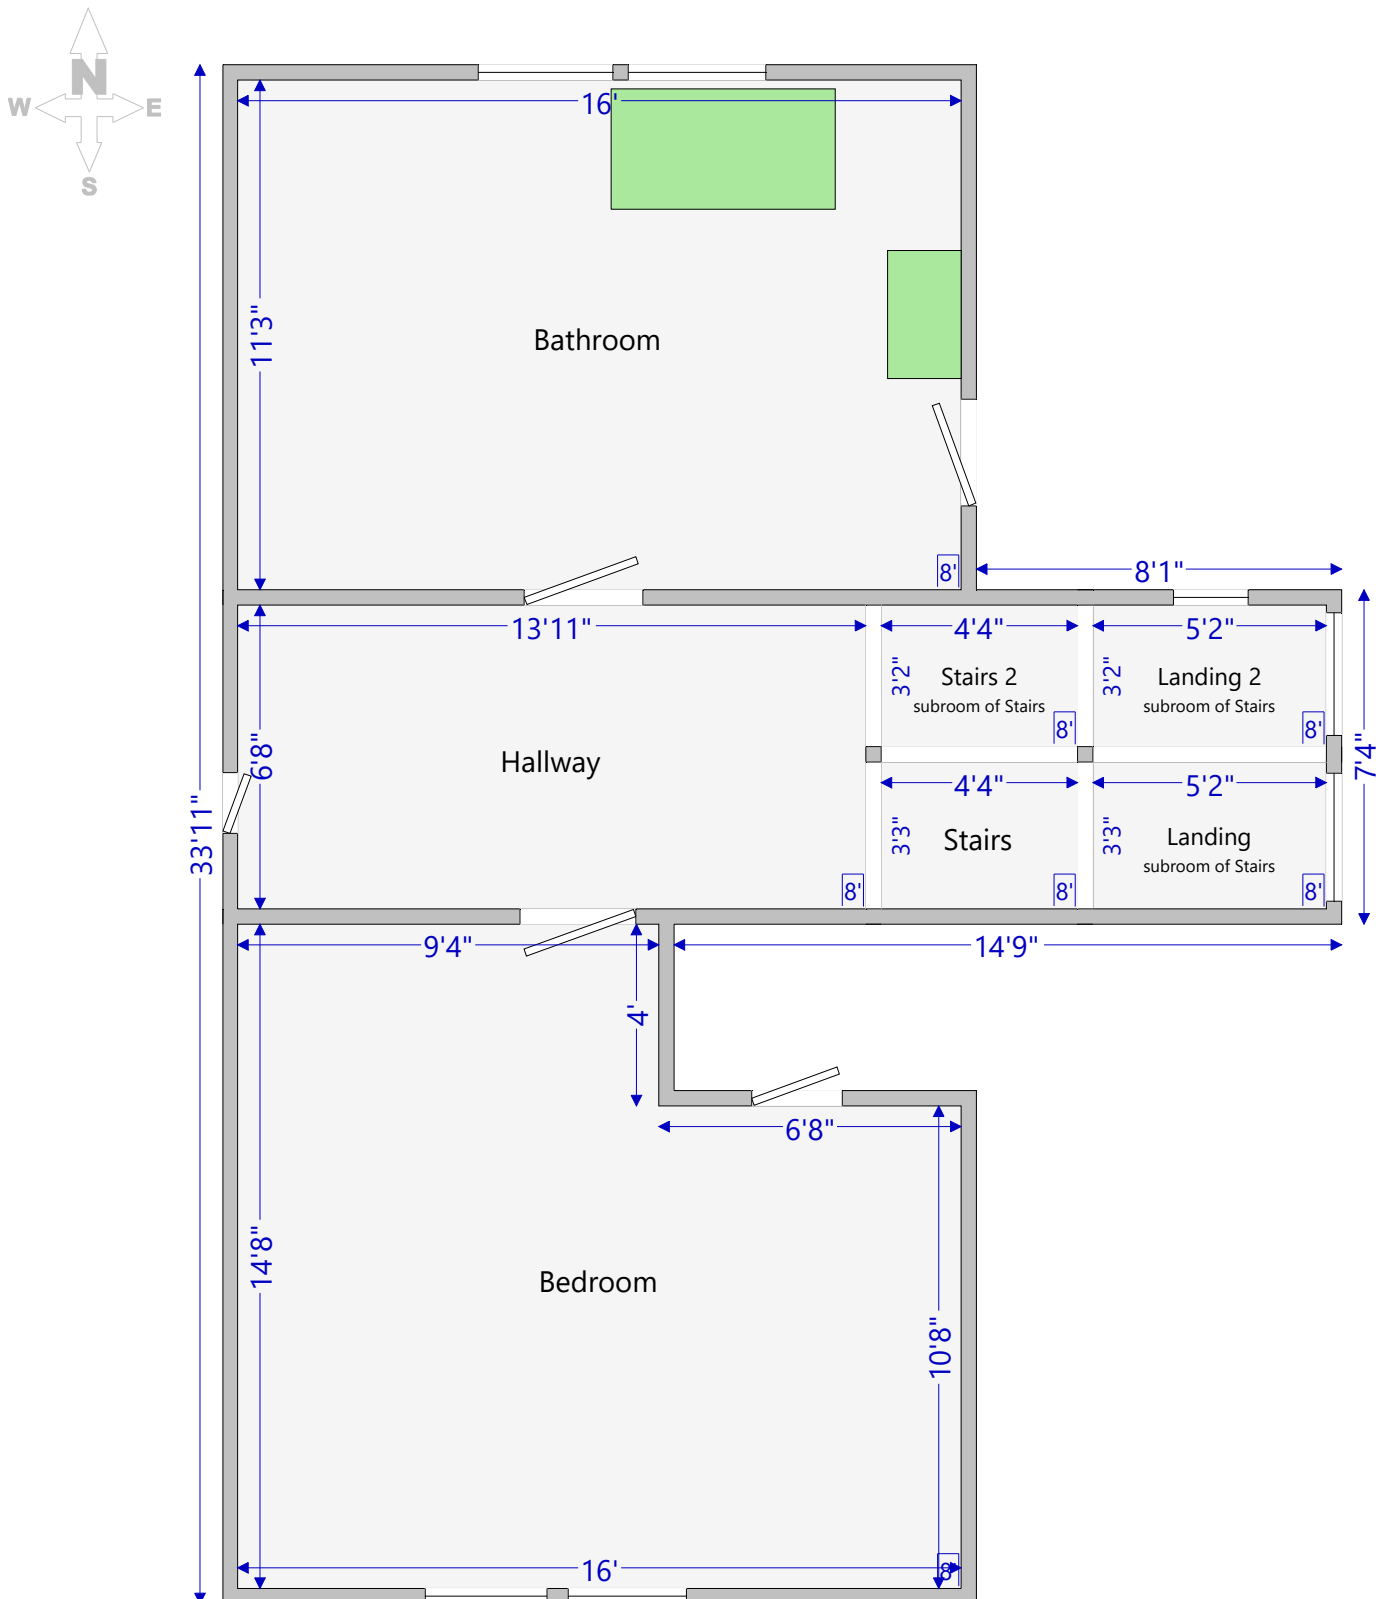




Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

B1 2:

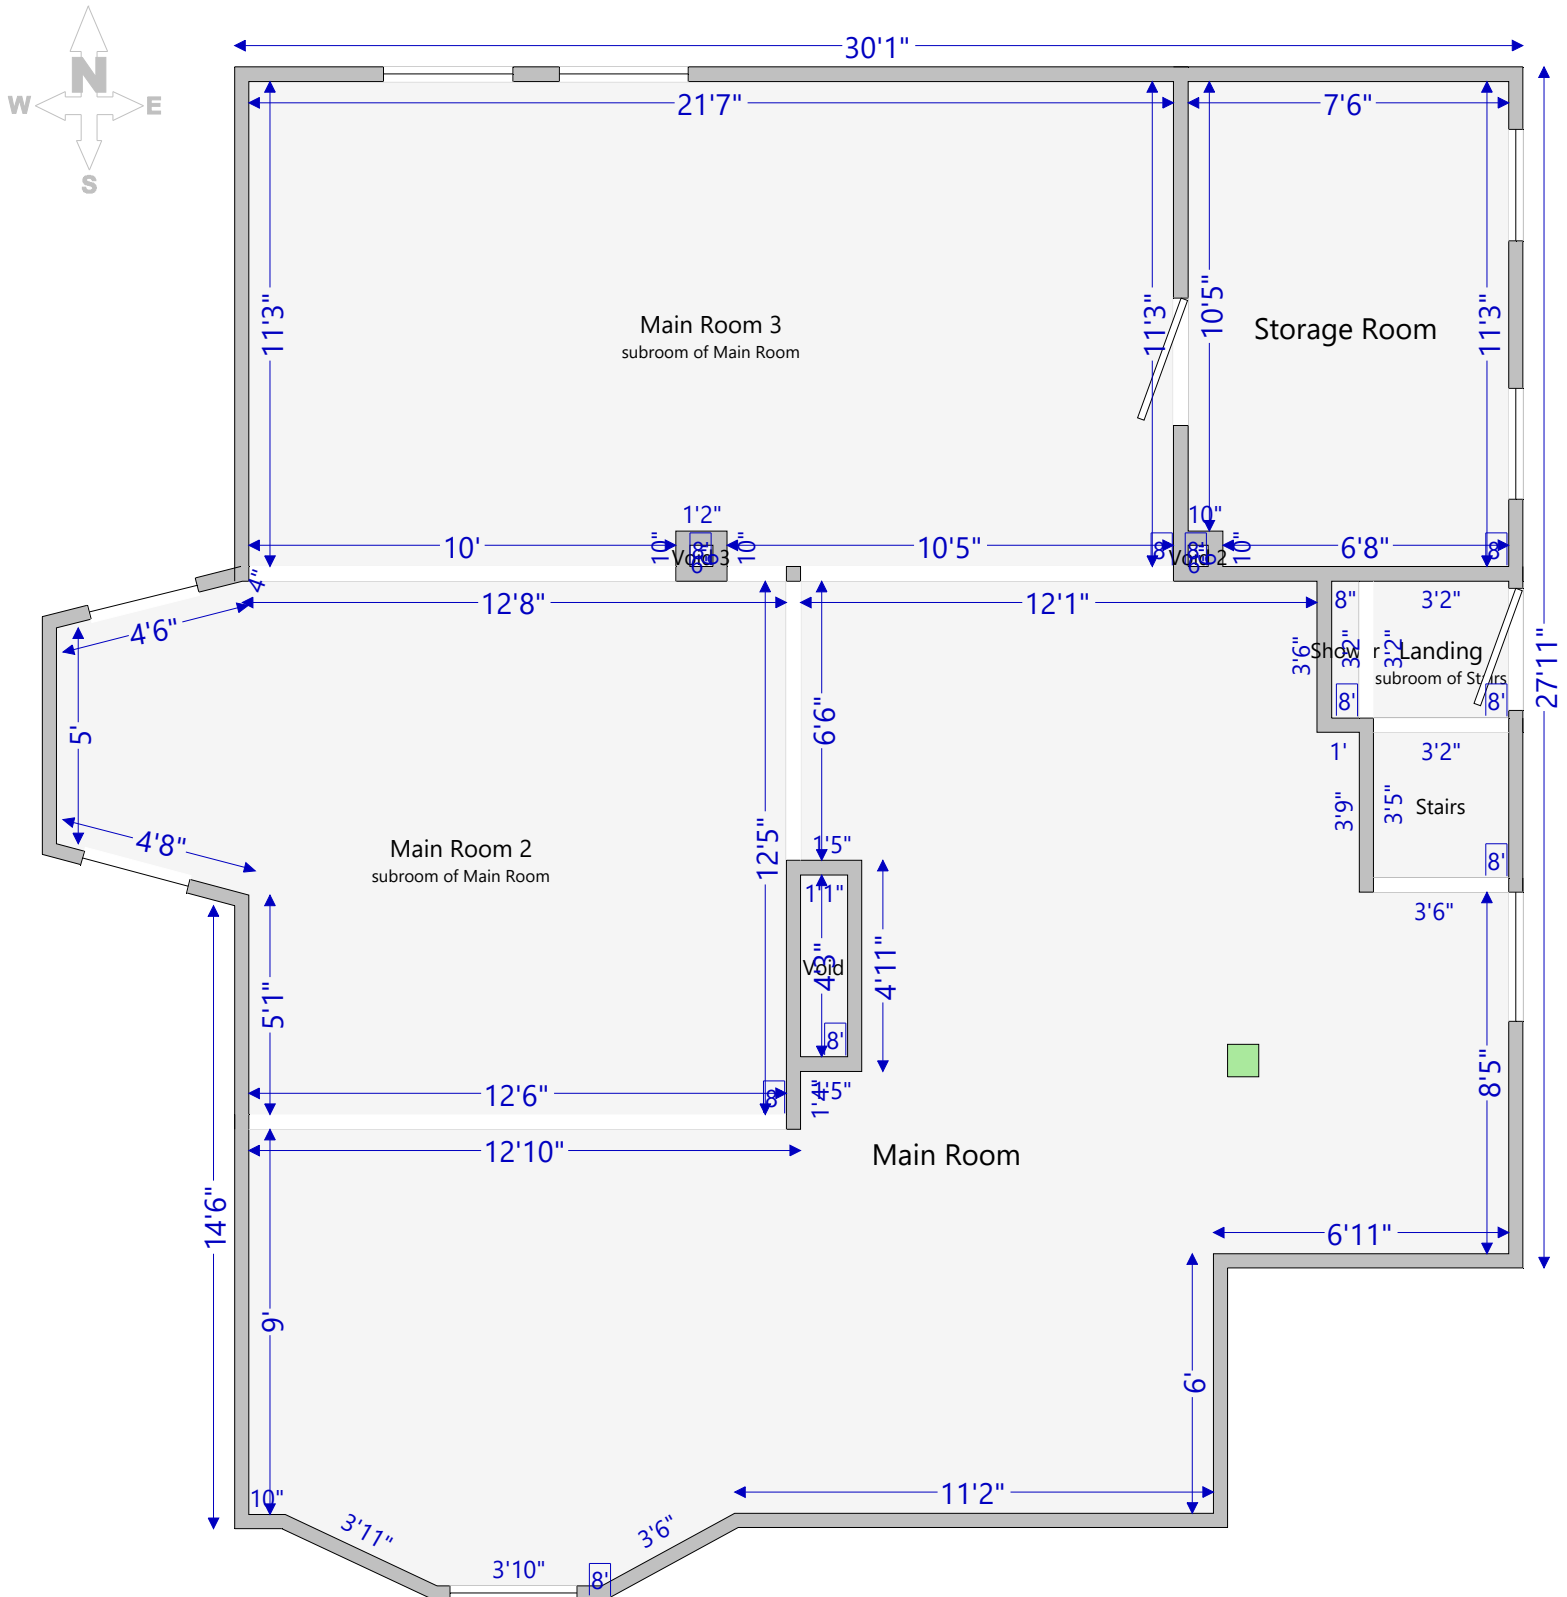



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						
FLOORPLAN: 1st floor						
General Items						
1 Dumpster, 10 Yard	1	\$532.15	EA	\$106.44	\$31.93	\$670.52
2 HVACi Report Boiler System Replacement Quote	1	\$30,875.41	EA	\$6,175.08	\$0.00	\$37,050.49
3 Bid Item, Electrical	1	\$0.00	EA	\$0.00	\$0.00	\$0.00
Open Item for possible code related electrical rewiring needed following city inspection						
4 Permits & Fees	1	\$0.00	LS	\$0.00	\$0.00	\$0.00
Open item for building permits needed						
General Items - Subtotal (4 items)				\$6,281.52	\$31.93	\$37,721.01

Living Room						
Length: 17'1"	Width: 23'5"	Height: 8' Flat				
Walls: 625.34 SF	Walls-subs: 449.82 SF	Walls-subs-cas-bsbd: 369.67 SF				
Doors: 84.24 SF	Windows: 90.23 SF	Openings: 0.00 SF	Missing Walls: 0.00 SF			
Floor: 307.73 SF	Ceiling: 307.70 SF	Perim (F): 64.42 LF	Perim (C): 78.16 LF			

5 Rem/Reset - Content Manipulation, Greater Than 300 SF, Per Room	1	\$263.43	RM	\$52.68	\$0.00	\$316.11
6 Rem/Reset - Base Shoe, Stain Grade	58.25	\$3.06	LF	\$35.66	\$0.07	\$213.98
7 Stain & Finish - Base Molding, Up to 6"	58.25	\$4.09	LF	\$47.66	\$0.94	\$286.85
8 Stain & Finish - Base Shoe	58.25	\$2.28	LF	\$26.56	\$0.49	\$159.87
9 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	303.50	\$1.77	SF	\$107.44	\$0.00	\$644.64
10 Replace - Wood Floor, Oak, 2-1/4", #1 Common	333.85	\$12.06	SF	\$805.24	\$95.95	\$4,927.42
Includes 10% waste on quantity.						
11 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	303.50	\$9.21	SF	\$559.04	\$18.57	\$3,372.85
12 Tear Out - Wood Floor, Underlayment, Felt	303.50	\$0.11	SF	\$6.68	\$0.00	\$40.07
13 Replace - Wood Floor, Underlayment, Felt	333.85	\$0.47	SF	\$31.38	\$2.40	\$190.69
Includes 10% waste on quantity.						
14 Clean - Final Clean, Per SF	307.70	\$0.52	SF	\$32.00	\$0.92	\$192.93
15 Rem/Reset - Blinds, Window/Door, Vertical, Vinyl	90.23	\$4.13	SF	\$74.54	\$0.00	\$447.19
16 Add-on, Diagonal Installation, Wood Floor	333.85	\$2.08	SF	\$138.88	\$0.00	\$833.29
Includes 10% waste on quantity.						
17 Rem/Reset - Crown Molding, Stain Grade, Over 6"	78.16	\$6.49	LF	\$101.46	\$0.23	\$608.95
18 Stain & Finish - Crown Molding, Over 6"	78.16	\$5.11	LF	\$79.88	\$3.94	\$483.21
19 Replace - Lath, Wood, Ceilings	52.50	\$4.07	SF	\$42.74	\$6.55	\$262.97
Includes 5% waste on quantity.						
20 Replace - Plaster, 3 Coats, w/o Lath, Ceilings	51.00	\$7.80	SF	\$79.56	\$3.92	\$481.28
Includes 2% waste on quantity.						
21 Replace - Lath, Wood, Walls	68.25	\$3.69	SF	\$50.36	\$8.52	\$310.72
Includes 5% waste on quantity.						
22 Replace - Plaster, 3 Coats, w/o Lath, Walls	66.30	\$6.82	SF	\$90.44	\$5.09	\$547.69



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
 Completed						

Includes 2% waste on quantity.

23 Stain & Finish - Casing	169.65	\$3.86	LF	\$130.98	\$2.75	\$788.58
24 Tear Out - Interior Door, Pre-hung, French, Double, Good	2	\$35.16	EA	\$14.06	\$0.00	\$84.38
25 Replace - Interior Door, Pre-hung, French, Double, Good	2	\$1,167.67	EA	\$467.06	\$114.21	\$2,916.61
26 Stain & Finish - Interior Door, Panel, Glass, Double	1	\$137.74	EA	\$27.54	\$0.58	\$165.86
27 Prime & Paint - Interior Door, Panel, Glass, Double	1	\$64.22	EA	\$12.84	\$0.48	\$77.54
28 Paint, 2 Coats - Drywall/Plaster Ceiling	307.70	\$1.52	SF	\$93.54	\$5.54	\$566.78
29 Paint, 2 Coats - Drywall/Plaster Wall	369.67	\$1.37	SF	\$101.30	\$6.65	\$614.40
Living Room - Subtotal (25 items)				\$3,209.52	\$277.80	\$19,534.86

Office						
Length: 9'11"	Width: 12'	Height: 8' Flat				
Walls: 345.34 SF	Walls-sub: 274.17 SF	Walls-sub-cas-bsbd: 247.54 SF				
Doors: 49.33 SF	Windows: 21.67 SF	Openings: 0.00 SF	Missing Walls: 0.00 SF			
Floor: 116.12 SF	Ceiling: 116.21 SF	Perim (F): 35.00 LF	Perim (C): 43.16 LF			
30 Rem/Reset - Light Fixture, Ceiling, Good	1	\$112.28	EA	\$22.46	\$0.00	\$134.74
31 Replace - Lath, Wood, Ceilings	52.50	\$4.07	SF	\$42.74	\$6.55	\$262.97
Includes 5% waste on quantity.						
32 Replace - Plaster, 3 Coats, w/o Lath, Ceilings	51.00	\$7.80	SF	\$79.56	\$3.92	\$481.28
Includes 2% waste on quantity.						
33 Rem/Reset - Interior Door, Slab Only, Oak, SC, 6 Panel	1	\$63.40	EA	\$12.68	\$0.00	\$76.08
34 Rem/Reset - Radiator, Cast Iron	1	\$20.94	EA	\$4.18	\$0.00	\$25.12
35 Paint, 2 Coats - Drywall/Plaster Ceiling	116.21	\$1.52	SF	\$35.32	\$2.09	\$214.05
36 Mask & Prep For Painting, LF	43.16	\$1.35	LF	\$11.66	\$1.92	\$71.85
37 Rem/Reset - Base Shoe, Stain Grade	35.00	\$3.06	LF	\$21.42	\$0.04	\$128.56
38 Stain & Finish - Base Molding, Up to 6"	35.00	\$4.09	LF	\$28.64	\$0.57	\$172.36
39 Stain & Finish - Base Shoe	35.00	\$2.28	LF	\$15.96	\$0.29	\$96.05
40 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	116.12	\$1.77	SF	\$41.10	\$0.00	\$246.63
41 Replace - Wood Floor, Oak, 2-1/4", #1 Common	127.73	\$12.06	SF	\$308.08	\$36.71	\$1,885.22
Includes 10% waste on quantity.						
42 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	116.12	\$9.21	SF	\$213.90	\$7.11	\$1,290.47
43 Add-on, Diagonal Installation, Wood Floor	127.73	\$2.08	SF	\$53.14	\$0.00	\$318.82
Includes 10% waste on quantity.						
44 Tear Out - Wood Floor, Underlayment, Felt	116.12	\$0.11	SF	\$2.56	\$0.00	\$15.33
45 Replace - Wood Floor, Underlayment, Felt	127.73	\$0.47	SF	\$12.00	\$0.92	\$72.96
Includes 10% waste on quantity.						
Office - Subtotal (16 items)				\$905.40	\$60.12	\$5,492.49



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						
Entry						
Length: 6'2" Walls: 177.32 SF Doors: 41.50 SF Floor: 30.32 SF Width: 4'11" Walls-subs: 135.69 SF Windows: 0.00 SF Ceiling: 30.32 SF Height: 8' Flat Walls-subs-cas-bsbd: 121.15 SF Openings: 0.00 SF Perim (F): 15.02 LF Missing Walls: 0.00 SF Perim (C): 22.18 LF						
46 Rem/Reset - Content Manipulation, 101 to 200 SF, Per Room	1	\$131.72	RM	\$26.34	\$0.00	\$158.06
47 Rem/Reset - Base Shoe, Stain Grade	15.02	\$3.06	LF	\$9.20	\$0.02	\$55.18
48 Stain & Finish - Base Molding, Up to 6"	15.02	\$4.09	LF	\$12.28	\$0.24	\$73.96
49 Stain & Finish - Quarter Round	15.02	\$2.94	LF	\$8.84	\$0.24	\$53.24
50 Stain & Finish - Casing	36.00	\$3.86	LF	\$27.80	\$0.58	\$167.34
51 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	30.32	\$1.77	SF	\$10.74	\$0.00	\$64.41
52 Replace - Wood Floor, Oak, 2-1/4", #1 Common	33.35	\$12.06	SF	\$80.44	\$9.59	\$492.23
Includes 10% waste on quantity.						
53 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	30.32	\$9.21	SF	\$55.86	\$1.86	\$336.97
54 Add-on, Diagonal Installation, Wood Floor	33.35	\$2.08	SF	\$13.88	\$0.00	\$83.25
Includes 10% waste on quantity.						
55 Tear Out - Wood Floor, Underlayment, Felt	30.32	\$0.11	SF	\$0.66	\$0.00	\$4.00
56 Replace - Wood Floor, Underlayment, Felt	33.35	\$0.47	SF	\$3.14	\$0.24	\$19.05
Includes 10% waste on quantity.						
57 Mask & Prep For Painting, LF	22.18	\$1.35	LF	\$5.98	\$0.98	\$36.90
protect walls during flooring repairs						
58 Tear Out - Plaster, Thin Coat, w/o Lath	28.33	\$0.74	SF	\$4.20	\$0.00	\$25.16
59 Replace - Plaster, Thin Coat, w/o Lath	29.75	\$1.83	SF	\$10.90	\$0.25	\$65.60
Includes 5% waste on quantity. Thin coat repair in area of cracking on walls						
60 Rem/Reset - Wall Hook, Good	5	\$14.09	EA	\$14.10	\$0.00	\$84.55
61 Paint, 2 Coats - Drywall/Plaster Wall	121.15	\$1.37	SF	\$33.20	\$2.18	\$201.36
62 Stain & Finish - Chair Rail	15.02	\$3.56	LF	\$10.70	\$0.18	\$64.35
63 Stain & Finish - Crown Molding, Up to 6"	22.18	\$3.56	LF	\$15.80	\$0.27	\$95.03
64 Clean - Final Clean, Per SF	60.64	\$0.52	SF	\$6.30	\$0.18	\$38.01
Entry - Subtotal (19 items)				\$350.36	\$16.81	\$2,118.65



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure						
Claim #061004792, Jeff Stamm						
Completed						
Hallway						
Length: 16'6" Walls: 374.68 SF Doors: 87.12 SF Floor: 92.58 SF Width: 7'3" Walls-subs: 228.03 SF Windows: 10.75 SF Ceiling: 92.62 SF Height: 8' Flat Walls-subs-cas-bsbd: 184.09 SF Openings: 48.89 SF Perim (F): 23.10 LF Missing Walls: 0.00 SF Perim (C): 46.82 LF						
65 Replace - Lath, Wood, Ceilings	97.25	\$4.07	SF	\$79.16	\$12.14	\$487.11
Includes 5% waste on quantity.						
66 Replace - Plaster, 3 Coats, w/o Lath, Ceilings	94.47	\$7.80	SF	\$147.38	\$7.26	\$891.51
Includes 2% waste on quantity.						
67 Replace - Lath, Wood, Walls	25.99	\$3.69	SF	\$19.18	\$3.24	\$118.32
Includes 5% waste on quantity.						
68 Replace - Plaster, 3 Coats, w/o Lath, Walls	25.25	\$6.82	SF	\$34.44	\$1.94	\$208.58
Includes 2% waste on quantity.						
69 Tear Out - Light Fixture, Ceiling, Good	1	\$18.29	EA	\$3.66	\$0.00	\$21.95
70 Replace - Light Fixture, Ceiling, Good	1	\$100.53	EA	\$20.10	\$2.92	\$123.55
71 Rem/Reset - Base Shoe, Stain Grade	23.10	\$3.06	LF	\$14.14	\$0.03	\$84.85
72 Stain & Finish - Base Molding, Up to 6"	23.10	\$4.09	LF	\$18.90	\$0.37	\$113.75
73 Stain & Finish - Quarter Round	23.10	\$2.94	LF	\$13.58	\$0.37	\$81.87
74 Stain & Finish - Crown Molding, Up to 6"	46.82	\$3.56	LF	\$33.34	\$0.56	\$200.58
75 Stain & Finish - Casing	102.89	\$3.86	LF	\$79.44	\$1.67	\$478.27
76 Paint, 2 Coats - Drywall/Plaster Ceiling	92.62	\$1.52	SF	\$28.16	\$1.67	\$170.62
77 Paint, 2 Coats - Drywall/Plaster Wall	184.09	\$1.37	SF	\$50.44	\$3.31	\$305.96
78 Mask & Prep For Painting, LF	46.82	\$1.35	LF	\$12.64	\$2.08	\$77.93
79 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	92.58	\$1.77	SF	\$32.78	\$0.00	\$196.65
80 Replace - Wood Floor, Oak, 2-1/4", #1 Common	101.84	\$12.06	SF	\$245.64	\$29.27	\$1,503.10
Includes 10% waste on quantity.						
81 Tear Out - Wood Floor, Underlayment, Felt	92.58	\$0.11	SF	\$2.04	\$0.00	\$12.22
82 Replace - Wood Floor, Underlayment, Felt	101.84	\$0.47	SF	\$9.58	\$0.73	\$58.17
Includes 10% waste on quantity.						
83 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	92.58	\$9.21	SF	\$170.54	\$5.67	\$1,028.87
84 Add-on, Diagonal Installation, Wood Floor	101.84	\$2.08	SF	\$42.36	\$0.00	\$254.19
Includes 10% waste on quantity.						
85 Tear Out - Interior Door, Pre-hung, Oak, SC, 4 Panel	2	\$25.73	EA	\$10.30	\$0.00	\$61.76
86 Replace - Interior Door, Pre-hung, Oak, SC, 4 Panel	2	\$616.96	EA	\$246.78	\$57.86	\$1,538.56
87 Rem/Reset - Interior Door, Pre-hung, Oak, SC, 4 Panel	1	\$189.36	EA	\$37.88	\$0.03	\$227.27
88 Stain & Finish - Interior Door, Panel	2	\$58.83	EA	\$23.54	\$0.72	\$141.92
89 Rem/Reset - Door Knob, Half Dummy	2	\$19.19	EA	\$7.68	\$0.00	\$46.06
90 Rem/Reset - Blinds, Window/Door, Vertical, Vinyl	38.25	\$4.13	SF	\$31.60	\$0.00	\$189.57
91 Clean - Final Clean, Per SF	92.62	\$0.52	SF	\$9.64	\$0.28	\$58.09



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840


Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
 Completed						

Hallway(con't)

Hallway - Subtotal (27 items)	\$1,424.92	\$132.12	\$8,681.28
-------------------------------	------------	----------	------------

Pass Through


Length: 2'5" **Width:** 3'2" **Height:** 8' Flat
Walls: 89.32 SF **Walls-sub:** 45.32 SF **Walls-sub-cas-bsbd:** 34.69 SF
Doors: 30.80 SF **Windows:** 0.00 SF **Openings:** 13.17 SF **Missing Walls:** 0.00 SF
Floor: 7.65 SF **Ceiling:** 7.65 SF **Perim (F):** 3.17 LF **Perim (C):** 11.18 LF



92	Clean - Final Clean, Per SF	7.65	\$0.52	SF	\$0.80	\$0.02	\$4.80
93	Replace - Underlayment, OSB, 1/2"	8.42	\$1.44	SF	\$2.42	\$0.29	\$14.84
	👉 Includes 10% waste on quantity.						
94	Replace - Vinyl Floor Tile, Very Good	8.42	\$4.99	SF	\$8.40	\$1.46	\$51.87
	👉 Includes 10% waste on quantity.						
95	Rem/Reset - Base Shoe, Stain Grade	3.17	\$3.06	LF	\$1.94	\$0.00	\$11.64
96	Stain & Finish - Base Molding, Up to 6"	3.17	\$4.09	LF	\$2.60	\$0.05	\$15.62
97	Stain & Finish - Casing	32.45	\$3.86	LF	\$25.06	\$0.53	\$150.85
98	Stain & Finish - Base Shoe	3.17	\$2.28	LF	\$1.44	\$0.03	\$8.69
99	Replace - Lath, Wood, Walls	47.59	\$3.69	SF	\$35.12	\$5.94	\$216.67
	👉 Includes 5% waste on quantity.						
100	Replace - Plaster, 2 Coats, w/o Lath, Walls	46.23	\$4.92	SF	\$45.50	\$2.30	\$275.25
	👉 Includes 2% waste on quantity.						
101	Paint, 2 Coats - Drywall/Plaster Ceiling	7.65	\$1.52	SF	\$2.32	\$0.14	\$14.09
102	Paint, 2 Coats - Drywall/Plaster Wall	34.69	\$1.37	SF	\$9.50	\$0.62	\$57.65
103	Replace - Lath, Wood, Ceilings	8.03	\$4.07	SF	\$6.54	\$1.00	\$40.22
	👉 Includes 5% waste on quantity.						
104	Replace - Plaster, 3 Coats, w/o Lath, Ceilings	7.80	\$7.80	SF	\$12.16	\$0.60	\$73.60
	👉 Includes 2% waste on quantity.						
Pass Through - Subtotal (13 items)					\$153.80	\$12.98	\$935.79

Stairs (including subrooms)

Length: 3'2" **Width:** 2'2" **Height:** 8' Flat
Walls: 275.96 SF **Walls-sub:** 136.58 SF **Walls-sub-cas-bsbd:** 116.65 SF
Doors: 0.00 SF **Windows:** 10.15 SF **Openings:** 88.89 SF **Missing Walls:** 0.00 SF
Floor: 24.54 SF **Ceiling:** 24.54 SF **Perim (F):** 14.10 LF **Perim (C):** 34.54 LF



105	Clean - Final Clean, Per SF	24.54		\$0.52	SF	\$2.56	\$0.07	\$15.39
106	Paint, 2 Coats - Drywall/Plaster Wall	25.56		\$1.37	SF	\$7.00	\$0.46	\$42.48
107	Paint, 2 Coats - Drywall/Plaster Ceiling	6.86		\$1.52	SF	\$2.08	\$0.12	\$12.63
Stairs (including subrooms) - Subtotal (3 items)						\$11.64	\$0.65	\$70.50



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
 Completed						

Stairs 3						
Length: 2'4"	Width: 3'2"	Height: 8' Flat				
Walls: 88.00 SF	Walls-subs: 70.85 SF	Walls-subs-cas-bsbd: 65.37 SF				
Doors: 17.47 SF	Windows: 0.00 SF	Openings: 0.00 SF	Missing Walls: 0.00 SF			
Floor: 7.39 SF	Ceiling: 7.39 SF	Perim (F): 7.77 LF	Perim (C): 11.00 LF			
108 Clean - Final Clean, Per SF	7.39	\$0.52	SF	\$0.76	\$0.02	\$4.62
109 Replace - Lath, Wood, Walls	74.39	\$3.69	SF	\$54.90	\$9.28	\$338.68
Includes 5% waste on quantity.						
110 Replace - Plaster, 2 Coats, w/o Lath, Walls	72.27	\$4.92	SF	\$71.12	\$3.60	\$430.29
Includes 2% waste on quantity.						
111 Paint, 2 Coats - Drywall/Plaster Wall	65.37	\$1.37	SF	\$17.92	\$1.18	\$108.66
112 Replace - Plaster, 3 Coats, w/o Lath, Ceilings	7.54	\$7.80	SF	\$11.76	\$0.58	\$71.15
Includes 2% waste on quantity.						
113 Paint, 2 Coats - Drywall/Plaster Ceiling	7.39	\$1.52	SF	\$2.24	\$0.13	\$13.61
114 Replace - Lath, Wood, Ceilings	7.76	\$4.07	SF	\$6.32	\$0.97	\$38.87
Includes 5% waste on quantity.						
115 Prime & Paint - Stair Riser, 4'	7	\$20.29	EA	\$28.40	\$0.51	\$170.94
116 Prime & Paint - Stair Stringer	7.00	\$5.22	LF	\$7.30	\$0.21	\$44.05
117 Prime & Paint - Stair Tread, 4'	7	\$32.70	EA	\$45.78	\$0.92	\$275.60
Stairs 3 - Subtotal (10 items)				\$246.50	\$17.40	\$1,496.47

Hallway Bathroom						
Length: 4'10"	Width: 2'10"	Height: 8' Flat				
Walls: 122.68 SF	Walls-subs: 108.76 SF	Walls-subs-cas-bsbd: 100.97 SF				
Doors: 14.17 SF	Windows: 0.00 SF	Openings: 0.00 SF	Missing Walls: 0.00 SF			
Floor: 13.69 SF	Ceiling: 13.69 SF	Perim (F): 12.85 LF	Perim (C): 15.32 LF			
118 Clean - Final Clean, Per SF	13.69	\$0.52	SF	\$1.42	\$0.04	\$8.58
119 Replace - Base Shoe, Stain Grade	13.62	\$3.92	LF	\$10.68	\$1.02	\$65.10
Includes 6% waste on quantity.						
120 Stain & Finish - Base Molding, Up to 6"	12.85	\$4.09	LF	\$10.52	\$0.21	\$63.29
121 Stain & Finish - Casing	17.22	\$3.86	LF	\$13.30	\$0.28	\$80.05
122 Stain & Finish - Base Shoe	12.85	\$2.28	LF	\$5.86	\$0.11	\$35.27
123 Replace - Lath, Wood, Walls	114.20	\$3.69	SF	\$84.28	\$14.25	\$519.93
Includes 5% waste on quantity.						
124 Replace - Plaster, 2 Coats, w/o Lath, Walls	110.94	\$4.92	SF	\$109.16	\$5.52	\$660.50
Includes 2% waste on quantity.						
125 Paint, 2 Coats - Drywall/Plaster Ceiling	13.69	\$1.52	SF	\$4.16	\$0.25	\$25.22



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						
Hallway Bathroom(con't)						
126 Paint, 2 Coats - Drywall/Plaster Wall	100.97	\$1.37	SF	\$27.66	\$1.82	\$167.81
127 Replace - Lath, Wood, Ceilings	14.37	\$4.07	SF	\$11.70	\$1.79	\$71.98
Includes 5% waste on quantity.						
128 Replace - Plaster, 3 Coats, w/o Lath, Ceilings	13.96	\$7.80	SF	\$21.78	\$1.07	\$131.74
Includes 2% waste on quantity.						
129 Replace - Light Fixture, Ceiling, Good	1	\$100.53	EA	\$20.10	\$2.92	\$123.55
130 Tear Out - Light Fixture, Wall, Good	1	\$11.43	EA	\$2.28	\$0.00	\$13.71
131 Replace - Light Fixture, Wall, Good	1	\$164.55	EA	\$32.92	\$6.36	\$203.83
132 Rem/Reset - Sink, Bathroom, Pedestal, Vitreous China, Good	1	\$225.97	EA	\$45.20	\$0.00	\$271.17
133 Replace - Base Molding, Stain Grade, Over 3" - Up to 6"	13.62	\$8.03	LF	\$21.88	\$3.78	\$135.03
Includes 6% waste on quantity.						
134 Reset - Toilet, One-Piece, Good	1	\$170.17	EA	\$34.04	\$0.19	\$204.40
Hallway Bathroom - Subtotal (17 items)				\$456.94	\$39.61	\$2,781.16
Kitchen						
Length: 11'4" Width: 11'2" Height: 8' Flat Walls: 360.00 SF Walls-subs: 265.78 SF Walls-subs-cas-bsbd: 221.70 SF Doors: 37.65 SF Windows: 25.50 SF Openings: 31.04 SF Missing Walls: 0.00 SF Floor: 126.56 SF Ceiling: 126.56 SF Perim (F): 32.59 LF Perim (C): 45.00 LF						
135 Clean - Final Clean, Per SF	121.78	\$0.52	SF	\$12.66	\$0.37	\$76.36
136 Replace - Cabinet, Base, Good, LF	4.00	\$223.95	LF	\$179.16	\$42.12	\$1,117.08
137 Replace - Countertop, Solid-Surface, Good, SF	8.00	\$109.42	SF	\$175.08	\$38.56	\$1,089.00
138 Replace - Cabinet, Wall, Good, LF	2.00	\$139.87	LF	\$55.94	\$11.26	\$346.94
139 Rem/Reset - Sink, Service, Wall-Hung, Cast-Iron	1	\$202.95	EA	\$40.60	\$0.00	\$243.55
140 Replace - Underlayment, OSB, 1/2"	139.22	\$1.44	SF	\$40.10	\$4.76	\$245.34
Includes 10% waste on quantity.						
141 Replace - Vinyl Floor Tile, Very Good	133.96	\$4.99	SF	\$133.70	\$23.23	\$825.39
Includes 10% waste on quantity.						
142 Rem/Reset - Base Shoe, Stain Grade	30.01	\$3.06	LF	\$18.36	\$0.04	\$110.23
143 Stain & Finish - Base Molding, Up to 6"	30.01	\$4.09	LF	\$24.54	\$0.49	\$147.77
144 Stain & Finish - Casing	68.56	\$3.86	LF	\$52.92	\$1.11	\$318.67
145 Stain & Finish - Base Shoe	30.01	\$2.28	LF	\$13.68	\$0.25	\$82.35
146 Replace - Lath, Wood, Walls	54.23	\$3.69	SF	\$40.02	\$6.77	\$246.90
Includes 5% waste on quantity.						
147 Replace - Plaster, 2 Coats, w/o Lath, Walls	52.68	\$4.92	SF	\$51.84	\$2.62	\$313.64
Includes 2% waste on quantity.						
148 Paint, 2 Coats - Drywall/Plaster Ceiling	126.56	\$1.52	SF	\$38.48	\$2.28	\$233.13
149 Paint, 2 Coats - Drywall/Plaster Wall	221.70	\$1.37	SF	\$60.74	\$3.99	\$368.46
Kitchen - Subtotal (15 items)				\$937.82	\$137.85	\$5,764.81



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
 Completed						

Kitchen Closet						
Length: 8"	Width: 3'6"	Height: 8' Flat				
Walls: 66.66 SF	Walls-sub: 46.89 SF	Walls-sub-cas-bsbd: 41.04 SF				
Doors: 20.00 SF	Windows: 0.00 SF	Openings: 0.00 SF	Missing Walls: 0.00 SF			
Floor: 2.34 SF	Ceiling: 2.34 SF	Perim (F): 4.79 LF	Perim (C): 8.34 LF			
150 Clean - Final Clean, Per SF	2.34	\$0.52	SF	\$0.24	\$0.01	\$1.47
151 Tear Out - Paneling, Oak, 1/4"	46.89	\$0.46	SF	\$4.32	\$0.00	\$25.89
152 Replace - Paneling, Oak, 1/4"	49.23	\$4.85	SF	\$47.76	\$8.60	\$295.13
Includes 5% waste on quantity.						
153 Tear Out - Shelf, Wood, 1"x8"	18.00	\$1.31	LF	\$4.72	\$0.00	\$28.30
154 Replace - Shelf, Wood, 1"x8"	18.90	\$16.31	LF	\$61.66	\$3.75	\$373.67
Includes 5% waste on quantity.						
155 Prime & Paint - Paneling, Wall	41.04	\$1.37	SF	\$11.24	\$0.74	\$68.20
156 Prime & Paint - Shelving	18.00	\$4.42	LF	\$15.92	\$0.65	\$96.13
Kitchen Closet - Subtotal (7 items)				\$145.86	\$13.75	\$888.79

Pantry Area						
Length: 3'11"	Width: 11'2"	Height: 8' Flat				
Walls: 241.32 SF	Walls-sub: 198.87 SF	Walls-sub-cas-bsbd: 154.74 SF				
Doors: 0.00 SF	Windows: 6.25 SF	Openings: 35.95 SF	Missing Walls: 0.00 SF			
Floor: 38.99 SF	Ceiling: 38.99 SF	Perim (F): 23.84 LF	Perim (C): 26.60 LF			
157 Clean - Final Clean, Per SF	33.43	\$0.52	SF	\$3.48	\$0.10	\$20.96
158 Tear Out - Cabinet, Full Height, Very Good, LF	8.19	\$16.06	LF	\$26.30	\$0.00	\$157.83
159 Replace - Cabinet, Full Height, Very Good, LF	8.19	\$311.36	LF	\$510.00	\$115.05	\$3,175.09
160 Tear Out - Light Fixture, Ceiling, Good	1	\$18.29	EA	\$3.66	\$0.00	\$21.95
161 Replace - Light Fixture, Ceiling, Good	1	\$100.53	EA	\$20.10	\$2.92	\$123.55
162 Replace - Lath, Wood, Walls	208.81	\$3.69	SF	\$154.10	\$26.06	\$950.66
Includes 5% waste on quantity.						
163 Replace - Lath, Wood, Ceilings	40.94	\$4.07	SF	\$33.32	\$5.11	\$205.06
Includes 5% waste on quantity.						
164 Replace - Plaster, 3 Coats, w/o Lath, Ceilings	39.77	\$7.80	SF	\$62.04	\$3.05	\$375.30
Includes 2% waste on quantity.						
165 Replace - Plaster, 3 Coats, w/o Lath, Walls	202.85	\$6.82	SF	\$276.68	\$15.58	\$1,675.70
Includes 2% waste on quantity.						
166 Replace - Vinyl Floor Tile, Very Good	36.77	\$4.99	SF	\$36.70	\$6.38	\$226.57
Includes 10% waste on quantity.						
167 Replace - Underlayment, OSB, 1/2"	42.89	\$1.44	SF	\$12.36	\$1.47	\$75.59



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						
Includes 10% waste on quantity.						
168 Replace - Base Shoe, Stain Grade	15.19	\$3.92	LF	\$11.92	\$1.14	\$72.61
Includes 6% waste on quantity.						
169 Tear Out - Base Molding, Stain Grade, Over 3" - Up to 6"	14.33	\$0.29	LF	\$0.84	\$0.00	\$5.00
170 Replace - Base Molding, Stain Grade, Over 3" - Up to 6"	15.19	\$8.03	LF	\$24.40	\$4.22	\$150.60
Includes 6% waste on quantity.						
171 Stain & Finish - Base Shoe	14.33	\$2.28	LF	\$6.54	\$0.12	\$39.34
172 Stain & Finish - Base Molding, Up to 6"	14.33	\$4.09	LF	\$11.72	\$0.23	\$70.56
Pantry Area - Subtotal (16 items)				\$1,194.16	\$181.43	\$7,346.37

Dining Room

Length: 13'6"

Width: 13'2"

Height: 8' Flat

Walls: 426.65 SF

Walls-subs: 329.85 SF

Walls-subs-cas-bsbd: 296.05 SF

Doors: 38.04 SF

Windows: 40.81 SF

Openings: 18.08 SF

Missing Walls: 0.00 SF

Floor: 164.10 SF

Ceiling: 164.12 SF

Perim (F): 44.10 LF

Perim (C): 46.73 LF


173 Rem/Reset - Base Shoe, Stain Grade	44.10	\$3.06	LF	\$26.98	\$0.05	\$161.97
174 Stain & Finish - Base Molding, Up to 6"	44.10	\$4.09	LF	\$36.08	\$0.71	\$217.16
175 Stain & Finish - Base Shoe	44.10	\$2.28	LF	\$20.10	\$0.37	\$121.01
176 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	164.10	\$1.77	SF	\$58.10	\$0.00	\$348.56
177 Replace - Wood Floor, Oak, 2-1/4", #1 Common	180.51	\$12.06	SF	\$435.40	\$51.88	\$2,664.23
Includes 10% waste on quantity.						
178 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	164.10	\$9.21	SF	\$302.28	\$10.04	\$1,823.68
179 Tear Out - Wood Floor, Underlayment, Felt	164.10	\$0.11	SF	\$3.62	\$0.00	\$21.67
180 Replace - Wood Floor, Underlayment, Felt	180.51	\$0.47	SF	\$16.96	\$1.30	\$103.10
Includes 10% waste on quantity.						
181 Rem/Reset - Blinds, Window/Door, Vertical, Vinyl	40.81	\$4.13	SF	\$33.72	\$0.00	\$202.27
182 Clean - Final Clean, Per SF	164.10	\$0.52	SF	\$17.06	\$0.49	\$102.89
183 Add-on, Diagonal Installation, Wood Floor	180.51	\$2.08	SF	\$75.10	\$0.00	\$450.56
Includes 10% waste on quantity.						
184 Replace - Lath, Wood, Ceilings	172.33	\$4.07	SF	\$140.28	\$21.51	\$863.18
Includes 5% waste on quantity.						
185 Replace - Plaster, 3 Coats, w/o Lath, Ceilings	167.40	\$7.80	SF	\$261.14	\$12.86	\$1,579.71
Includes 2% waste on quantity.						
186 Replace - Lath, Wood, Walls	346.34	\$3.69	SF	\$255.60	\$43.22	\$1,576.82
Includes 5% waste on quantity.						
187 Replace - Plaster, 3 Coats, w/o Lath, Walls	336.45	\$6.82	SF	\$458.92	\$25.84	\$2,779.35
Includes 2% waste on quantity.						
188 Paint, 2 Coats - Drywall/Plaster Ceiling	164.12	\$1.52	SF	\$49.90	\$2.95	\$302.32
189 Paint, 2 Coats - Drywall/Plaster Wall	296.05	\$1.37	SF	\$81.12	\$5.33	\$492.04




Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						
Dining Room(con't)						
190 Replace - Interior Door, Pre-hung, Oak, SC, Flush	1	\$308.93	EA	\$61.78	\$10.45	\$381.16
191 Prime & Paint - Casing	64.09	\$1.81	LF	\$23.20	\$0.50	\$139.70
Dining Room - Subtotal (19 items)				\$2,357.34	\$187.50	\$14,331.38
1st floor - Subtotal (191 items)				\$17,675.78	\$1,109.95	\$107,163.56

FLOORPLAN: 2nd floor 2								
Bedroom_3								
Length: 12'7"		Width: 16'4"		Height: 8' Flat				
Walls: 442.67 SF		Walls-sub: 368.61 SF		Walls-sub-cas-bsbd: 329.85 SF				
Doors: 32.97 SF		Windows: 40.69 SF		Openings: 0.00 SF Missing Walls: 0.00 SF				
Floor: 196.69 SF		Ceiling: 196.72 SF		Perim (F): 49.24 LF Perim (C): 55.33 LF				
192	Prime & Paint - Crown Molding, Up to 6"	55.33		\$1.70	LF	\$18.82	\$0.33	\$113.21
193	Prime & Paint - Casing	88.08		\$1.81	LF	\$31.88	\$0.69	\$191.99
194	Prime & Paint - Base Molding, Up to 6"	49.24		\$1.82	LF	\$17.92	\$0.41	\$107.94
195	Prime & Paint - Base Shoe	49.24		\$1.41	LF	\$13.88	\$0.12	\$83.43
196	Rem/Reset - Base Shoe, Paint Grade	49.24		\$2.86	LF	\$28.16	\$0.21	\$169.20
197	Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	196.69		\$1.77	SF	\$69.62	\$0.00	\$417.76
198	Replace - Wood Floor, Oak, 2-1/4", #1 Common	216.36		\$12.06	SF	\$521.86	\$62.18	\$3,193.34
	🗑 Includes 10% waste on quantity.							
199	Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	196.69		\$9.21	SF	\$362.30	\$12.04	\$2,185.86
200	Tear Out - Wood Floor, Underlayment, Felt	196.69		\$0.11	SF	\$4.32	\$0.00	\$25.96
201	Replace - Wood Floor, Underlayment, Felt	216.36		\$0.47	SF	\$20.34	\$1.56	\$123.59
	🗑 Includes 10% waste on quantity.							
202	Prime & Paint - Drywall/Plaster Ceiling	196.72		\$1.52	SF	\$59.80	\$3.54	\$362.36
203	Prime & Paint - Drywall/Plaster Wall	329.85		\$1.37	SF	\$90.38	\$5.94	\$548.22
204	Rem/Reset - Blinds, Window/Door, Vertical, Vinyl	40.69		\$4.13	SF	\$33.62	\$0.00	\$201.67
205	Clean - Final Clean, Per SF	196.69		\$0.52	SF	\$20.46	\$0.59	\$123.33
Bedroom_3 - Subtotal (14 items)						\$1,293.36	\$87.61	\$7,847.86

Master Bedroom										
Length: 17'6"		Width: 15'7"		Height: 8' Flat						
Walls: 530.66 SF		Walls-sub: 444.25 SF		Walls-sub-cas-bsbd: 397.97 SF						
Doors: 30.61 SF		Windows: 55.41 SF		Openings: 0.00 SF						
Floor: 247.27 SF		Ceiling: 247.27 SF		Missing Walls: 0.00 SF						
				Perim (F): 60.60 LF						
				Perim (C): 66.34 LF						
206 Prime & Paint - Crown Molding, Up to 6"					66.34	\$1.70	LF	\$22.56	\$0.40	\$135.73
207 Prime & Paint - Casing					104.07	\$1.81	LF	\$37.68	\$0.81	\$226.86



Liberty Mutual Insurance


PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						

Master Bedroom(con't)

208 Prime & Paint - Base Molding, Up to 6"	60.60	\$1.82	LF	\$22.06	\$0.51	\$132.86
209 Prime & Paint - Base Shoe	60.60	\$1.41	LF	\$17.08	\$0.15	\$102.67
210 Rem/Reset - Base Shoe, Paint Grade	60.60	\$2.86	LF	\$34.66	\$0.25	\$208.22
211 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	246.83	\$1.77	SF	\$87.38	\$0.00	\$524.27
212 Replace - Wood Floor, Oak, 2-1/4", #1 Common	271.51	\$12.06	SF	\$654.88	\$78.03	\$4,007.32
Includes 10% waste on quantity.						
213 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	246.83	\$9.21	SF	\$454.66	\$15.11	\$2,743.08
214 Tear Out - Wood Floor, Underlayment, Felt	246.83	\$0.11	SF	\$5.44	\$0.00	\$32.59
215 Replace - Wood Floor, Underlayment, Felt	271.51	\$0.47	SF	\$25.52	\$1.95	\$155.08
Includes 10% waste on quantity.						
216 Prime & Paint - Drywall/Plaster Ceiling	247.27	\$1.52	SF	\$75.18	\$4.45	\$455.48
217 Prime & Paint - Drywall/Plaster Wall	397.97	\$1.37	SF	\$109.04	\$7.16	\$661.42
218 Rem/Reset - Blinds, Window/Door, Vertical, Vinyl	55.41	\$4.13	SF	\$45.76	\$0.00	\$274.60
219 Clean - Final Clean, Per SF	246.83	\$0.52	SF	\$25.68	\$0.74	\$154.77
Master Bedroom - Subtotal (14 items)				\$1,617.58	\$109.56	\$9,814.95

Hallway

Length: 10'10" Width: 10'2" Height: 8' Flat Walls: 335.32 SF Walls-subs: 189.54 SF Walls-subs-cas-bsbd: 148.90 SF Doors: 124.10 SF Windows: 0.00 SF Openings: 20.85 SF Missing Walls: 0.00 SF Floor: 88.74 SF Ceiling: 88.53 SF Perim (F): 13.75 LF Perim (C): 41.93 LF						
220 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	88.74	\$1.77	SF	\$31.42	\$0.00	\$188.49
221 Replace - Wood Floor, Oak, 2-1/4", #1 Common	97.61	\$12.06	SF	\$235.44	\$28.05	\$1,440.66
Includes 10% waste on quantity.						
222 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	88.74	\$9.21	SF	\$163.46	\$5.43	\$986.18
223 Rem/Reset - Base Shoe, Stain Grade	13.75	\$3.06	LF	\$8.42	\$0.02	\$50.52
224 Tear Out - Wood Floor, Underlayment, Felt	88.74	\$0.11	SF	\$1.96	\$0.00	\$11.72
225 Replace - Wood Floor, Underlayment, Felt	97.61	\$0.47	SF	\$9.18	\$0.70	\$55.75
Includes 10% waste on quantity.						
226 Stain & Finish - Casing	116.97	\$3.86	LF	\$90.30	\$1.89	\$543.69
227 Stain & Finish - Base Shoe	13.75	\$2.28	LF	\$6.28	\$0.12	\$37.76
228 Stain & Finish - Base Molding, Up to 6"	13.75	\$4.09	LF	\$11.24	\$0.22	\$67.70
229 Replace - Lath, Wood, Walls	41.90	\$3.69	SF	\$30.92	\$5.23	\$190.76
Includes 5% waste on quantity.						
230 Replace - Plaster, 3 Coats, w/o Lath, Walls	40.70	\$6.82	SF	\$55.52	\$3.13	\$336.23
Includes 2% waste on quantity.						
231 Prime & Paint - Drywall/Plaster Ceiling	88.53	\$1.52	SF	\$26.92	\$1.59	\$163.08



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						


Master Bedroom Closet(con't)

Master Bedroom Closet - Subtotal (9 items)

\$82.34 \$3.10 \$497.04

Bedroom_2 Closet

Length: 5'10" Width: 2'9" Height: 8' Flat
Walls: 137.34 SF Walls-subs: 116.80 SF Walls-subs-cas-bsbd: 104.91 SF
Doors: 15.94 SF Windows: 4.83 SF Openings: 0.00 SF Missing Walls: 0.00 SF
Floor: 16.04 SF Ceiling: 16.04 SF Perim (F): 14.24 LF Perim (C): 17.16 LF




253 Prime & Paint - Crown Molding, Up to 6"	17.16	\$1.70	LF	\$5.84	\$0.10	\$35.12
254 Prime & Paint - Casing	28.34	\$1.81	LF	\$10.26	\$0.22	\$61.77
255 Prime & Paint - Base Molding, Up to 6"	14.24	\$1.82	LF	\$5.18	\$0.12	\$31.21
256 Prime & Paint - Base Shoe	14.24	\$1.41	LF	\$4.02	\$0.03	\$24.13
257 Rem/Reset - Base Shoe, Paint Grade	14.24	\$2.86	LF	\$8.14	\$0.06	\$48.93
258 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	16.04	\$9.21	SF	\$29.54	\$0.98	\$178.25
259 Prime & Paint - Drywall/Plaster Ceiling	16.04	\$1.52	SF	\$4.88	\$0.29	\$29.55
260 Prime & Paint - Drywall/Plaster Wall	104.91	\$1.37	SF	\$28.74	\$1.89	\$174.35
261 Clean - Final Clean, Per SF	16.04	\$0.52	SF	\$1.66	\$0.05	\$10.05

Bedroom_2 Closet - Subtotal (9 items)

\$98.26 \$3.74 \$593.36

Stairs (including subrooms)

Length: 4' Width: 3'2" Height: 8' Flat
Walls: 383.98 SF Walls-subs: 230.81 SF Walls-subs-cas-bsbd: 203.20 SF
Doors: 17.22 SF Windows: 0.00 SF Openings: 67.78 SF Missing Walls: 0.00 SF
Floor: 35.89 SF Ceiling: 35.89 SF Perim (F): 22.92 LF Perim (C): 48.02 LF




262 Clean - Final Clean, Per SF	35.89	\$0.52	SF	\$3.74	\$0.12	\$22.53
263 Paint, 2 Coats - Drywall/Plaster Wall	203.20	\$1.37	SF	\$55.68	\$3.67	\$337.74
264 Paint, 2 Coats - Drywall/Plaster Ceiling	35.89	\$1.52	SF	\$10.90	\$0.64	\$66.08

Stairs (including subrooms) - Subtotal (3 items)

\$70.32 \$4.43 \$426.35

Bedroom Closet

Length: 4'1" Width: 3'2" Height: 8' Flat
Walls: 116.00 SF Walls-subs: 96.30 SF Walls-subs-cas-bsbd: 85.38 SF
Doors: 15.17 SF Windows: 5.00 SF Openings: 0.00 SF Missing Walls: 0.00 SF
Floor: 12.93 SF Ceiling: 12.93 SF Perim (F): 11.58 LF Perim (C): 14.50 LF



265 Prime & Paint - Crown Molding, Up to 6"	14.50	\$1.70	LF	\$4.94	\$0.09	\$29.68
---	-------	--------	----	--------	--------	---------



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						
🏠 Bedroom Closet(con't)						
266 Prime & Paint - Casing	27.83	\$1.81	LF	\$10.08	\$0.22	\$60.67
267 Prime & Paint - Base Molding, Up to 6"	11.58	\$1.82	LF	\$4.22	\$0.10	\$25.39
268 Prime & Paint - Base Shoe	11.58	\$1.41	LF	\$3.26	\$0.03	\$19.61
269 Rem/Reset - Base Shoe, Paint Grade	11.58	\$2.86	LF	\$6.62	\$0.05	\$39.79
270 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	12.93	\$9.21	SF	\$23.82	\$0.79	\$143.70
271 Prime & Paint - Drywall/Plaster Ceiling	12.93	\$1.52	SF	\$3.94	\$0.23	\$23.82
272 Prime & Paint - Drywall/Plaster Wall	85.38	\$1.37	SF	\$23.40	\$1.54	\$141.91
273 Clean - Final Clean, Per SF	12.93	\$0.52	SF	\$1.34	\$0.04	\$8.11
Bedroom Closet - Subtotal (9 items)				\$81.62	\$3.09	\$492.68
🏠 Bedroom_2						
Length: 10'7" Width: 13'7" Height: 8' Flat						
Walls: 387.34 SF Walls-subs: 307.51 SF Walls-subs-cas-bsbd: 273.58 SF						
Doors: 33.16 SF Windows: 46.75 SF Openings: 0.00 SF Missing Walls: 0.00 SF						
Floor: 138.89 SF Ceiling: 139.16 SF Perim (F): 42.32 LF Perim (C): 48.41 LF						
274 Replace - Lath, Wood, Walls	95.78	\$3.69	SF	\$70.68	\$11.95	\$436.06
🗑️ Includes 5% waste on quantity.						
275 Replace - Plaster, 3 Coats, w/o Lath, Walls	93.04	\$6.82	SF	\$126.90	\$7.15	\$768.59
🗑️ Includes 2% waste on quantity.						
276 Replace - Lath, Wood, Ceilings	52.50	\$4.07	SF	\$42.74	\$6.55	\$262.97
🗑️ Includes 5% waste on quantity.						
277 Replace - Plaster, 3 Coats, w/o Lath, Ceilings	51.00	\$7.80	SF	\$79.56	\$3.92	\$481.28
🗑️ Includes 2% waste on quantity.						
278 Prime & Paint - Crown Molding, Up to 6"	48.41	\$1.70	LF	\$16.46	\$0.29	\$99.05
279 Prime & Paint - Casing	77.58	\$1.81	LF	\$28.08	\$0.61	\$169.11
280 Prime & Paint - Base Molding, Up to 6"	42.32	\$1.82	LF	\$15.40	\$0.36	\$92.78
281 Prime & Paint - Base Shoe	42.32	\$1.41	LF	\$11.94	\$0.10	\$71.71
282 Rem/Reset - Base Shoe, Paint Grade	42.32	\$2.86	LF	\$24.20	\$0.18	\$145.41
283 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	138.89	\$1.77	SF	\$49.16	\$0.00	\$295.00
284 Replace - Wood Floor, Oak, 2-1/4", #1 Common	152.78	\$12.06	SF	\$368.50	\$43.91	\$2,254.94
🗑️ Includes 10% waste on quantity.						
285 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	138.89	\$9.21	SF	\$255.84	\$8.50	\$1,543.52
286 Tear Out - Wood Floor, Underlayment, Felt	138.89	\$0.11	SF	\$3.06	\$0.00	\$18.34
287 Replace - Wood Floor, Underlayment, Felt	152.78	\$0.47	SF	\$14.36	\$1.10	\$87.26
🗑️ Includes 10% waste on quantity.						
288 Prime & Paint - Drywall/Plaster Ceiling	139.16	\$1.52	SF	\$42.30	\$2.51	\$256.34
289 Prime & Paint - Drywall/Plaster Wall	273.58	\$1.37	SF	\$74.96	\$4.92	\$454.66



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure Claim #061004792, Jeff Stamm						
Completed						
Bedroom_2(con't)						
290 Clean - Final Clean, Per SF	138.89	\$0.52	SF	\$14.44	\$0.42	\$87.08
Bedroom_2 - Subtotal (17 items)				\$1,238.58	\$92.47	\$7,524.12
Bedroom Length: 10'11" Walls: 354.66 SF Doors: 30.73 SF Floor: 122.81 SF Width: 11'3" Walls-subs: 292.38 SF Windows: 31.50 SF Ceiling: 122.81 SF Height: 8' Flat Walls-subs-cas-bsbd: 261.45 SF Openings: 0.00 SF Perim (F): 38.50 LF Missing Walls: 0.00 SF Perim (C): 44.34 LF						
291 Prime & Paint - Crown Molding, Up to 6"	44.34	\$1.70	LF	\$15.08	\$0.27	\$90.72
292 Prime & Paint - Casing	71.00	\$1.81	LF	\$25.70	\$0.55	\$154.76
293 Prime & Paint - Base Molding, Up to 6"	38.50	\$1.82	LF	\$14.02	\$0.32	\$84.41
294 Prime & Paint - Base Shoe	38.50	\$1.41	LF	\$10.86	\$0.09	\$65.24
295 Rem/Reset - Base Shoe, Paint Grade	38.50	\$2.86	LF	\$22.02	\$0.16	\$132.30
296 Replace - Lath, Wood, Walls Includes 5% waste on quantity.	307.00	\$3.69	SF	\$226.56	\$38.31	\$1,397.70
297 Replace - Plaster, 3 Coats, w/o Lath, Walls Includes 2% waste on quantity.	75.76	\$6.82	SF	\$103.34	\$5.82	\$625.84
298 Replace - Lath, Wood, Ceilings Includes 5% waste on quantity.	31.50	\$4.07	SF	\$25.64	\$3.93	\$157.78
299 Replace - Plaster, 3 Coats, w/o Lath, Ceilings Includes 2% waste on quantity.	30.60	\$7.80	SF	\$47.74	\$2.35	\$288.78
300 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	122.81	\$1.77	SF	\$43.48	\$0.00	\$260.85
301 Replace - Wood Floor, Oak, 2-1/4", #1 Common Includes 10% waste on quantity.	135.09	\$12.06	SF	\$325.84	\$38.82	\$1,993.84
302 Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	122.81	\$9.21	SF	\$226.22	\$7.52	\$1,364.83
303 Tear Out - Wood Floor, Underlayment, Felt	122.81	\$0.11	SF	\$2.70	\$0.00	\$16.21
304 Replace - Wood Floor, Underlayment, Felt Includes 10% waste on quantity.	135.09	\$0.47	SF	\$12.70	\$0.97	\$77.16
305 Prime & Paint - Drywall/Plaster Ceiling	122.81	\$1.52	SF	\$37.34	\$2.21	\$226.22
306 Prime & Paint - Drywall/Plaster Wall	261.45	\$1.37	SF	\$71.64	\$4.71	\$434.54
307 Rem/Reset - Blinds, Window/Door, Vertical, Vinyl	31.50	\$4.13	SF	\$26.02	\$0.00	\$156.12
308 Clean - Final Clean, Per SF	122.81	\$0.52	SF	\$12.78	\$0.37	\$77.01
Bedroom - Subtotal (18 items)				\$1,249.68	\$106.40	\$7,604.31



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840


Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						
Bathroom						
Length: 7'2" Walls: 239.33 SF Doors: 34.44 SF Floor: 40.23 SF Width: 7'9" Walls-subs: 157.12 SF Windows: 0.00 SF Ceiling: 40.23 SF Height: 8' Flat Walls-subs-cas-bsbd: 135.80 SF Openings: 47.78 SF Perim (F): 15.66 LF Missing Walls: 0.00 SF Perim (C): 29.92 LF						
309 Prime & Paint - Casing	34.13	\$1.81	LF	\$12.36	\$0.27	\$74.41
310 Rem/Reset - Radiator, Cast Iron	1	\$20.94	EA	\$4.18	\$0.00	\$25.12
311 Rem/Reset - Toilet, One-Piece, Good	1	\$258.69	EA	\$51.74	\$0.19	\$310.62
312 Rem/Reset - Sink, Bathroom, Wall-Hung, Good	1	\$226.85	EA	\$45.38	\$0.00	\$272.23
313 Tear Out - Medicine Cabinet, Good	1	\$15.61	EA	\$3.12	\$0.00	\$18.73
314 Replace - Medicine Cabinet, Good	1	\$237.91	EA	\$47.58	\$6.26	\$291.75
315 Tear Out - Exhaust Fan, w/ Light, Good	1	\$17.15	EA	\$3.44	\$0.00	\$20.59
316 Replace - Exhaust Fan, w/ Light, Good	1	\$193.61	EA	\$38.72	\$7.97	\$240.30
317 Replace - Drywall, 5/8", Taped, Ceilings	42.24	\$3.74	SF	\$31.60	\$1.50	\$191.08
Includes 5% waste on quantity.						
318 Drywall Tape/Joint Repair	29.92	\$8.38	LF	\$50.14	\$0.47	\$301.34
319 Paint, 2 Coats - Drywall/Plaster Ceiling	40.23	\$1.52	SF	\$12.24	\$0.72	\$74.11
320 Tear Out - Ceramic/Porcelain Tile, 4"x4", Wall, Good	67.90	\$2.12	SF	\$28.80	\$0.00	\$172.75
321 Replace - Ceramic/Porcelain Tile, 4"x4", Wall, Good	71.97	\$15.61	SF	\$224.70	\$13.30	\$1,361.45
Includes 6% waste on quantity.						
322 Paint, 2 Coats - Drywall/Plaster Wall	67.90	\$1.37	SF	\$18.60	\$1.22	\$112.84
323 Tear Out - Underlayment, Cement Board, 1/2"	67.90	\$1.20	SF	\$16.30	\$0.00	\$97.78
324 Replace - Underlayment, Cement Board, 1/2"	74.69	\$4.72	SF	\$70.50	\$7.80	\$430.84
Includes 10% waste on quantity.						
325 Tear Out - Ceramic Towel Bar	1	\$4.29	EA	\$0.86	\$0.00	\$5.15
326 Replace - Ceramic Towel Bar	1	\$64.94	EA	\$12.98	\$1.78	\$79.70
327 Tear Out - Ceramic Soap Dish	2	\$2.86	EA	\$1.14	\$0.00	\$6.86
328 Replace - Ceramic Soap Dish	2	\$43.05	EA	\$17.22	\$2.20	\$105.52
329 Tear Out - Bullnose/Accent Tile, Good	15.66	\$1.43	LF	\$4.48	\$0.00	\$26.87
330 Replace - Bullnose/Accent Tile, Good	16.60	\$17.67	LF	\$58.66	\$8.98	\$360.96
Includes 6% waste on quantity.						
331 Clean - Final Clean, Per SF	40.23	\$0.52	SF	\$4.18	\$0.12	\$25.22
Bathroom - Subtotal (23 items)				\$758.92	\$52.78	\$4,606.22



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
Completed						
Bathroom Bathtub						
Length: 2'8" Walls: 121.32 SF Doors: 0.00 SF Floor: 13.11 SF Width: 4'11" Walls-subs: 73.43 SF Windows: 0.00 SF Ceiling: 13.11 SF Height: 8' Flat Walls-subs-cas-bsbd: 47.16 SF Openings: 47.78 SF Perim (F): 7.79 LF Missing Walls: 0.00 SF Perim (C): 15.18 LF						
332 Rem/Reset - Bathtub, Cast-Iron, Good	1	\$411.59	EA	\$82.32	\$0.13	\$494.04
333 Rem/Reset - Faucet & Showerhead, Double-Handle, Good	1	\$179.50	EA	\$35.90	\$0.02	\$215.42
334 Rem/Reset - Shower Rod	1	\$52.66	EA	\$10.54	\$0.00	\$63.20
335 Rem/Reset - Towel Bar, Good	1	\$48.53	EA	\$9.70	\$0.00	\$58.23
336 Tear Out - Ceramic/Porcelain Tile, 4"x4", Wall, Good	135.80	\$2.12	SF	\$57.58	\$0.00	\$345.48
337 Replace - Ceramic/Porcelain Tile, 4"x4", Wall, Good	143.95	\$15.61	SF	\$449.42	\$26.60	\$2,723.08
Includes 6% waste on quantity.						
338 Tear Out - Underlayment, Cement Board, 1/2"	135.80	\$1.20	SF	\$32.60	\$0.00	\$195.56
339 Replace - Underlayment, Cement Board, 1/2"	149.38	\$4.72	SF	\$141.02	\$15.60	\$861.69
Includes 10% waste on quantity.						
Bathroom Bathtub - Subtotal (8 items)				\$819.08	\$42.35	\$4,956.70
2nd floor 2 - Subtotal (148 items)				\$8,157.26	\$559.04	\$49,501.75

FLOORPLAN: 3rd floor 2									
Bedroom									
Length: 16'		Width: 14'8"		Height: 8' Flat					
Walls: 490.66 SF		Walls-subs: 441.92 SF		Walls-subs-cas-bsbd: 409.02 SF					
Doors: 30.22 SF		Windows: 18.37 SF		Openings: 0.00 SF Missing Walls: 0.00 SF					
Floor: 208.00 SF		Ceiling: 208.00 SF		Perim (F): 55.59 LF Perim (C): 61.34 LF					
340	Prime & Paint - Casing			62.17	\$1.81	LF	\$22.50	\$0.48	\$135.51
341	Prime & Paint - Base Molding, Up to 6"			55.59	\$1.82	LF	\$20.24	\$0.47	\$121.88
342	Prime & Paint - Base Shoe			55.59	\$1.41	LF	\$15.68	\$0.13	\$94.19
343	Rem/Reset - Base Shoe, Paint Grade			55.59	\$2.86	LF	\$31.80	\$0.23	\$191.02
344	Tear Out - Wood Floor, Oak, 2-1/4", #1 Common			208.00	\$1.77	SF	\$73.64	\$0.00	\$441.80
345	Replace - Wood Floor, Oak, 2-1/4", #1 Common			228.80	\$12.06	SF	\$551.86	\$65.76	\$3,376.95
	🗑 Includes 10% waste on quantity.								
346	Tear Out - Wood Floor, Underlayment, Felt			208.00	\$0.11	SF	\$4.58	\$0.00	\$27.46
347	Replace - Wood Floor, Underlayment, Felt			228.80	\$0.47	SF	\$21.50	\$1.65	\$130.69
	🗑 Includes 10% waste on quantity.								
348	Prime & Paint - Wood Floor			208.00	\$1.29	SF	\$53.66	\$3.74	\$325.72
349	Prime & Paint - Drywall/Plaster Ceiling			208.00	\$1.52	SF	\$63.24	\$3.74	\$383.14
350	Prime & Paint - Drywall/Plaster Wall			409.02	\$1.37	SF	\$112.08	\$7.36	\$679.80
351	Clean - Final Clean, Per SF			208.00	\$0.52	SF	\$21.64	\$0.62	\$130.42



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840


Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
 Completed						

Bedroom(con't)

352 Rem/Reset - Radiator, Cast Iron	1	\$20.94	EA	\$4.18	\$0.00	\$25.12
Bedroom - Subtotal (13 items)				\$996.60	\$84.18	\$6,063.70

Hallway


Length: 13'11"	Width: 6'8"	Height: 8' Flat	
Walls: 329.32 SF	Walls-sub: 249.18 SF	Walls-sub-cas-bsbd: 225.46 SF	
Doors: 38.44 SF	Windows: 0.00 SF	Openings: 42.25 SF	Missing Walls: 0.00 SF
Floor: 92.78 SF	Ceiling: 92.78 SF	Perim (F): 26.17 LF	Perim (C): 41.18 LF



353 Prime & Paint - Casing	42.66	\$1.81	LF	\$15.44	\$0.33	\$92.99
354 Prime & Paint - Base Molding, Up to 6"	26.17	\$1.82	LF	\$9.52	\$0.22	\$57.37
355 Prime & Paint - Base Shoe	26.17	\$1.41	LF	\$7.38	\$0.06	\$44.34
356 Rem/Reset - Base Shoe, Paint Grade	26.17	\$2.86	LF	\$14.96	\$0.11	\$89.91
357 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	92.78	\$1.77	SF	\$32.84	\$0.00	\$197.06
358 Replace - Wood Floor, Oak, 2-1/4", #1 Common	102.06	\$12.06	SF	\$246.18	\$29.33	\$1,506.36
Includes 10% waste on quantity.						
359 Tear Out - Wood Floor, Underlayment, Felt	92.78	\$0.11	SF	\$2.04	\$0.00	\$12.25
360 Replace - Wood Floor, Underlayment, Felt	102.06	\$0.47	SF	\$9.60	\$0.74	\$58.31
Includes 10% waste on quantity.						
361 Prime & Paint - Wood Floor	92.78	\$1.29	SF	\$23.94	\$1.67	\$145.29
362 Prime & Paint - Drywall/Plaster Ceiling	92.78	\$1.52	SF	\$28.20	\$1.67	\$170.89
363 Prime & Paint - Drywall/Plaster Wall	225.46	\$1.37	SF	\$61.78	\$4.06	\$374.72
364 Clean - Final Clean, Per SF	92.78	\$0.52	SF	\$9.66	\$0.28	\$58.19
365 Rem/Reset - Radiator, Cast Iron	1	\$20.94	EA	\$4.18	\$0.00	\$25.12
Hallway - Subtotal (13 items)				\$465.72	\$38.47	\$2,832.80

Stairs (including subrooms)

Length: 4'4"	Width: 3'3"	Height: 8' Flat	
Walls: 509.32 SF	Walls-sub: 243.74 SF	Walls-sub-cas-bsbd: 219.92 SF	
Doors: 0.00 SF	Windows: 15.90 SF	Openings: 147.04 SF	Missing Walls: 0.00 SF
Floor: 60.95 SF	Ceiling: 60.95 SF	Perim (F): 25.42 LF	Perim (C): 55.01 LF




366 Clean - Final Clean, Per SF	60.95	\$0.52	SF	\$6.32	\$0.18	\$38.20
367 Paint, 2 Coats - Drywall/Plaster Wall	219.92	\$1.37	SF	\$60.26	\$3.96	\$365.52
368 Paint, 2 Coats - Drywall/Plaster Ceiling	60.95	\$1.52	SF	\$18.54	\$1.09	\$112.28
369 Prime & Paint - Stair Riser, 4'	14	\$20.29	EA	\$56.82	\$1.02	\$341.90
370 Prime & Paint - Stair Stringer	14.00	\$5.22	LF	\$14.62	\$0.41	\$88.11
371 Prime & Paint - Stair Tread, 4'	28	\$32.70	EA	\$183.12	\$3.66	\$1,102.38
Stairs (including subrooms) - Subtotal (6 items)				\$339.68	\$10.32	\$2,048.39




Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure				Claim #061004792, Jeff Stamm		
 Completed						

Bathroom							
Length: 16'	Width: 11'3"	Height: 8' Flat					
Walls: 436.00 SF	Walls-sub: 381.55 SF	Walls-sub-cas-bsbd: 343.09 SF					
Doors: 32.97 SF	Windows: 21.25 SF	Openings: 0.00 SF	Missing Walls: 0.00 SF				
Floor: 180.00 SF	Ceiling: 180.00 SF	Perim (F): 48.41 LF	Perim (C): 54.50 LF				
372 Prime & Paint - Casing	64.43	\$1.81	LF	\$23.32	\$0.50	\$140.44	
373 Prime & Paint - Base Molding, Up to 6"	45.58	\$1.82	LF	\$16.60	\$0.38	\$99.93	
374 Prime & Paint - Base Shoe	45.58	\$1.41	LF	\$12.86	\$0.11	\$77.23	
375 Rem/Reset - Base Shoe, Paint Grade	45.58	\$2.86	LF	\$26.08	\$0.19	\$156.63	
376 Tear Out - Wood Floor, Oak, 2-1/4", #1 Common	162.33	\$1.77	SF	\$57.46	\$0.00	\$344.78	
377 Replace - Wood Floor, Oak, 2-1/4", #1 Common	178.56	\$12.06	SF	\$430.68	\$51.32	\$2,635.43	
 Includes 10% waste on quantity.							
378 Tear Out - Wood Floor, Underlayment, Felt	162.33	\$0.11	SF	\$3.58	\$0.00	\$21.44	
379 Replace - Wood Floor, Underlayment, Felt	178.56	\$0.47	SF	\$16.78	\$1.29	\$102.00	
 Includes 10% waste on quantity.							
380 Prime & Paint - Wood Floor	162.33	\$1.29	SF	\$41.88	\$2.92	\$254.21	
381 Prime & Paint - Drywall/Plaster Ceiling	180.00	\$1.52	SF	\$54.72	\$3.24	\$331.56	
382 Prime & Paint - Drywall/Plaster Wall	343.09	\$1.37	SF	\$94.00	\$6.18	\$570.22	
383 Clean - Final Clean, Per SF	162.33	\$0.52	SF	\$16.88	\$0.49	\$101.78	
384 Rem/Reset - Radiator, Cast Iron	1	\$20.94	EA	\$4.18	\$0.00	\$25.12	
385 Rem/Reset - Bathtub, Cast-Iron, Good	1	\$411.59	EA	\$82.32	\$0.13	\$494.04	
386 Rem/Reset - Toilet, One-Piece, Good	1	\$258.69	EA	\$51.74	\$0.19	\$310.62	
Bathroom - Subtotal (15 items)				\$933.08	\$66.94	\$5,665.43	
3rd floor 2 - Subtotal (47 items)				\$2,735.08	\$199.91	\$16,610.32	

FLOORPLAN: B1 2							
Main Room (including subrooms)							
Length: 29'4" Width: 23'4" Height: 8' Flat							
Walls: 1,839.99 SF Walls-sub: 1,246.99 SF Walls-sub-cas-bsbd: 1,142.11 SF							
Doors: 20.00 SF Windows: 40.31 SF Openings: 278.15 SF Missing Walls: 0.00 SF							
Floor: 834.36 SF Ceiling: 834.36 SF Perim (F): 142.87 LF Perim (C): 230.01 LF							
387	Rem/Reset - Content Manipulation, Greater Than 300 SF, Per Room	1	\$263.43	RM	\$52.68	\$0.00	\$316.11
388	Prime & Paint - Brick Wall	1,142.11	\$1.39	SF	\$317.52	\$27.41	\$1,932.47
389	Tear Out - Paneling, Oak, 1/4"	128.18	\$0.46	SF	\$11.80	\$0.00	\$70.76
390	Replace - Paneling, Oak, 1/4"	134.59	\$4.85	SF	\$130.56	\$23.50	\$806.83
	Includes 5% waste on quantity.						
391	Prime & Paint - Concrete Floor	833.82	\$1.29	SF	\$215.12	\$15.01	\$1,305.76



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	Total O&P	Total Taxes	Total Cost
ESTIMATE: Structure Claim #061004792, Jeff Stamm						
Completed						
Main Room (including subrooms)(con't)						
392 Prime & Paint - Paneling, Wall	118.88	\$1.37	SF	\$32.58	\$2.14	\$197.59
393 Clean - Final Clean, Per SF	834.36	\$0.52	SF	\$86.78	\$2.51	\$523.15
Main Room (including subrooms) - Subtotal (7 items)				\$847.04	\$70.57	\$5,152.67
Stairs (including subrooms) Length: 3'2" Walls: 206.64 SF Doors: 18.89 SF Floor: 20.85 SF Width: 3'5" Walls-subs: 104.93 SF Windows: 0.00 SF Ceiling: 20.85 SF Height: 8' Flat Walls-subs-cas-bsbd: 95.32 SF Openings: 62.55 SF Perim (F): 10.01 LF Missing Walls: 0.00 SF Perim (C): 25.86 LF						
394 Clean - Final Clean, Per SF	20.85	\$0.52	SF	\$2.16	\$0.06	\$13.06
395 Paint, 2 Coats - Drywall/Plaster Wall	95.32	\$1.37	SF	\$26.12	\$1.71	\$158.42
396 Paint, 2 Coats - Drywall/Plaster Ceiling	20.85	\$1.52	SF	\$6.36	\$0.38	\$38.44
397 Prime & Paint - Stair Riser, 4'	7	\$20.29	EA	\$28.40	\$0.51	\$170.94
398 Prime & Paint - Stair Stringer	7.00	\$5.22	LF	\$7.30	\$0.21	\$44.05
399 Prime & Paint - Stair Tread, 4'	7	\$32.70	EA	\$45.78	\$0.92	\$275.60
Stairs (including subrooms) - Subtotal (6 items)				\$116.12	\$3.79	\$700.51
B1 2 - Subtotal (13 items)				\$963.16	\$74.36	\$5,853.18
Minimum Charge Adjustments						
400 Minimum Charge, HVAC	1	\$447.52	LS	\$68.56	\$1.34	\$412.72
401 Minimum Charge, Drywall, 1 Trip	1	\$438.00	LS	\$5.86	\$1.40	\$36.55
Minimum Charge Adjustments - Subtotal (11 items)				\$74.42	\$2.74	\$449.27
Subtotal				\$29,605.70	\$1,946.00	\$179,578.08



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: [Structure](#)

Claim #061004792, Jeff Stamm

 Completed

 FLOORPLAN: General Items		Quantity
Walls		0.00 SF
Walls and Ceilings		0.00 SF
Floors		0.00 SF
Floor Perimeter		0.00 LF
Ceilings		0.00 SF
Ceiling Perimeter		0.00 LF

 FLOORPLAN: Floor Plan		Quantity
Walls		1,864.63 SF
Walls and Ceilings		2,499.02 SF
Floors		634.39 SF
Floor Perimeter		204.46 LF
Ceilings		634.39 SF
Ceiling Perimeter		226.83 LF

 FLOORPLAN: Floor Plan		Quantity
Walls		3,304.53 SF
Walls and Ceilings		4,274.79 SF
Floors		970.26 SF
Floor Perimeter		323.80 LF
Ceilings		970.26 SF
Ceiling Perimeter		384.17 LF

 FLOORPLAN: Floor Plan		Quantity
Walls		3,672.84 SF
Walls and Ceilings		4,604.92 SF
Floors		932.08 SF
Floor Perimeter		304.99 LF
Ceilings		932.08 SF
Ceiling Perimeter		402.86 LF

 FLOORPLAN: B1		Quantity
Walls		2,896.62 SF
Walls and Ceilings		3,877.60 SF
Floors		980.98 SF
Floor Perimeter		213.74 LF
Ceilings		980.98 SF
Ceiling Perimeter		362.13 LF

 FLOORPLAN: Ground floor		Quantity
Walls		3,321.26 SF
Walls and Ceilings		4,301.08 SF



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure

Claim #061004792, Jeff Stamm

 Completed

Floors	979.94 SF
Floor Perimeter	296.76 LF
Ceilings	979.82 SF
Ceiling Perimeter	387.45 LF

 FLOORPLAN: 2nd floor	Quantity
Walls	3,644.67 SF
Walls and Ceilings	4,637.61 SF
Floors	992.87 SF
Floor Perimeter	341.16 LF
Ceilings	992.94 SF
Ceiling Perimeter	448.07 LF

 FLOORPLAN: 3rd floor	Quantity
Walls	2,643.30 SF
Walls and Ceilings	3,335.88 SF
Floors	692.58 SF
Floor Perimeter	245.51 LF
Ceilings	692.58 SF
Ceiling Perimeter	316.45 LF

 FLOORPLAN: PPS Floorplan	Quantity
Walls	0.00 SF
Walls and Ceilings	0.00 SF
Floors	0.00 SF
Floor Perimeter	0.00 LF
Ceilings	0.00 SF
Ceiling Perimeter	0.00 LF

 FLOORPLAN: 1st floor	Quantity
Walls	3,331.28 SF
Walls and Ceilings	4,272.10 SF
Floors	940.70 SF
Floor Perimeter	297.99 LF
Ceilings	940.82 SF
Ceiling Perimeter	406.27 LF

 FLOORPLAN: 2nd floor 2	Quantity
Walls	3,576.60 SF
Walls and Ceilings	4,532.97 SF
Floors	956.28 SF
Floor Perimeter	328.28 LF
Ceilings	956.37 SF



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure

Claim #061004792, Jeff Stamm

Completed

Ceiling Perimeter	447.15 LF
-------------------	-----------

FLOORPLAN: 3rd floor 2	Quantity
Walls	1,765.30 SF
Walls and Ceilings	2,307.03 SF
Floors	541.73 SF
Floor Perimeter	155.59 LF
Ceilings	541.73 SF
Ceiling Perimeter	212.03 LF

FLOORPLAN: B1 2	Quantity
Walls	2,525.29 SF
Walls and Ceilings	3,471.38 SF
Floors	946.09 SF
Floor Perimeter	205.97 LF
Ceilings	946.09 SF
Ceiling Perimeter	315.71 LF

Recap by Area	Total Cost	Percentage
General Items	\$0.00	0.00%
Hallway / Landing	\$0.00	0.00%
Basement / Attic	\$0.00	0.00%
Bedroom	\$0.00	0.00%
Bathroom	\$0.00	0.00%
Uncaptured Space	\$0.00	0.00%
Debris removal	\$0.00	0.00%
Textiles	\$0.00	0.00%
Packout	\$0.00	0.00%
Bedroom	\$0.00	0.00%
Other (#2)	\$0.00	0.00%
Bedroom 2	\$0.00	0.00%
Other	\$0.00	0.00%
Other (#3)	\$0.00	0.00%
Hallway / Landing	\$0.00	0.00%
Bathroom	\$0.00	0.00%
Uncaptured Space	\$0.00	0.00%
Bedroom 5, Bedroom	\$0.00	0.00%
Bedroom 3	\$0.00	0.00%
Other (#4)	\$0.00	0.00%
Living room	\$0.00	0.00%
Dining room	\$0.00	0.00%
Uncaptured Space	\$0.00	0.00%
Study / Office	\$0.00	0.00%



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: [Structure](#)

Claim #061004792, Jeff Stamm

 Completed

Hallway / Landing 3, Hallway / Landing	\$0.00	0.00%
Room 6	\$0.00	0.00%
Closet / Pantry	\$0.00	0.00%
Other	\$0.00	0.00%
Kitchen	\$0.00	0.00%
Hallway / Landing	\$0.00	0.00%
Debris Removal	\$0.00	0.00%
Plumbing	\$0.00	0.00%
Main	\$0.00	0.00%
Main 2	\$0.00	0.00%
Void	\$0.00	0.00%
Fireplace	\$0.00	0.00%
Void 2	\$0.00	0.00%
Main 3	\$0.00	0.00%
Stairs	\$0.00	0.00%
Landing	\$0.00	0.00%
Stairs 2	\$0.00	0.00%
Void 3	\$0.00	0.00%
Main 4	\$0.00	0.00%
Storage Room	\$0.00	0.00%
Living Room	\$0.00	0.00%
Office	\$0.00	0.00%
Entryway	\$0.00	0.00%
Fireplace	\$0.00	0.00%
Hallway	\$0.00	0.00%
Stairs	\$0.00	0.00%
Stairs 2	\$0.00	0.00%
Landing	\$0.00	0.00%
Kitchen	\$0.00	0.00%
Stairs 3	\$0.00	0.00%
Half Bathroom	\$0.00	0.00%
Kitchen 2	\$0.00	0.00%
Pantry	\$0.00	0.00%
Pantry 2	\$0.00	0.00%
Dining Room	\$0.00	0.00%
General Items	\$0.00	0.00%
Bedroom_2	\$0.00	0.00%
Bedroom_1	\$0.00	0.00%
Void	\$0.00	0.00%
Bedroom_1 Closet	\$0.00	0.00%
Bedroom_1 Closet 2	\$0.00	0.00%
Landing	\$0.00	0.00%
Bedroom_2 Closet	\$0.00	0.00%



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure

Claim #061004792, Jeff Stamm

 Completed

Hallway Closet	\$0.00	0.00%
Hallway	\$0.00	0.00%
Stairs	\$0.00	0.00%
Bedroom_3 Closet	\$0.00	0.00%
Stairs 2	\$0.00	0.00%
Bedroom_4 Closet	\$0.00	0.00%
Bedroom_4 Closet 2	\$0.00	0.00%
Bedroom_3	\$0.00	0.00%
Bedroom_4	\$0.00	0.00%
Bathroom Bathtub	\$0.00	0.00%
Bathroom	\$0.00	0.00%
Bedroom	\$0.00	0.00%
Bedroom Closet	\$0.00	0.00%
Void	\$0.00	0.00%
Stairs	\$0.00	0.00%
Hallway	\$0.00	0.00%
Landing	\$0.00	0.00%
Void 2	\$0.00	0.00%
Stairs 2	\$0.00	0.00%
Bathroom	\$0.00	0.00%
Bathroom Closet	\$0.00	0.00%
Bathroom 2	\$0.00	0.00%
General Items	\$0.00	0.00%
Contents	\$0.00	0.00%
Living Room	\$16,047.54	10.87%
Office	\$4,526.97	3.07%
Entry	\$1,751.48	1.19%
Fireplace	\$0.00	0.00%
Hallway	\$7,124.24	4.82%
Pass Through	\$769.01	0.52%
Stairs	\$49.02	0.03%
Stairs 2 (subroom of Stairs)	\$3.98	0.00%
Landing (subroom of Stairs)	\$5.21	0.00%
Stairs 3	\$1,232.57	0.83%
Hallway Bathroom	\$2,284.61	1.55%
Kitchen	\$4,689.14	3.18%
Kitchen Closet	\$729.18	0.49%
Pantry Area	\$5,970.78	4.04%
Dining Room	\$11,786.54	7.98%
Void	\$0.00	0.00%
General Items	\$31,407.56	21.27%
Bedroom_3	\$6,466.89	4.38%
Void	\$0.00	0.00%



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure

Claim #061004792, Jeff Stamm

 Completed

Master Bedroom	\$8,087.81	5.48%
Void 2	\$0.00	0.00%
Hallway	\$3,754.51	2.54%
Bedroom_3 Closet	\$482.62	0.33%
Hallway Closet	\$0.00	0.00%
Master Bedroom Closet	\$411.60	0.28%
Bedroom_2 Closet	\$491.36	0.33%
Stairs 3	\$0.00	0.00%
Stairs	\$102.42	0.07%
Stairs 2 (subroom of Stairs)	\$68.72	0.05%
Landing 2 (subroom of Stairs)	\$90.23	0.06%
Landing (subroom of Stairs)	\$90.23	0.06%
Bedroom Closet	\$407.97	0.28%
Bedroom_2	\$6,193.07	4.19%
Bedroom	\$6,248.23	4.23%
Bathroom	\$3,794.52	2.57%
Bathroom Bathtub	\$4,095.27	2.77%
Bedroom	\$4,982.92	3.37%
Hallway	\$2,328.61	1.58%
Stairs	\$1,364.55	0.92%
Stairs 2 (subroom of Stairs)	\$91.23	0.06%
Landing 2 (subroom of Stairs)	\$118.41	0.08%
Landing (subroom of Stairs)	\$124.20	0.08%
Bathroom	\$4,665.41	3.16%
Main Room	\$2,217.13	1.50%
Main Room 3 (subroom of Main Room)	\$1,388.42	0.94%
Main Room 2 (subroom of Main Room)	\$629.51	0.43%
Void	\$0.00	0.00%
Stairs	\$512.02	0.35%
Landing (subroom of Stairs)	\$68.58	0.05%
Shower	\$0.00	0.00%
Storage Room	\$0.00	0.00%
Void 2	\$0.00	0.00%
Void 3	\$0.00	0.00%
Total, all areas	\$147,654.27	100.00%

Recap by Category

	Total Cost	Percentage
CAB - Cabinetry > CAB - Base Cabinets	\$895.80	0.61%
CAB - Cabinetry > CAB - Countertops	\$875.36	0.59%
CAB - Cabinetry > CAB - Full-Height Cabinets	\$2,681.57	1.81%
CAB - Cabinetry > CAB - Medicine Cabinets	\$253.52	0.17%
CAB - Cabinetry > CAB - Wall Cabinets	\$279.74	0.19%
CLN - Cleaning - Structure > CLN - Structure	\$1,634.25	1.10%



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure

Claim #061004792, Jeff Stamm

Completed

CPS - Contents - Packing, Handling & Storage	\$658.58	0.44%
DMO - General Demolition	\$532.15	0.36%
DOR - Doors > DOR - Flush Doors	\$308.93	0.21%
DOR - Doors > DOR - Hardware	\$38.38	0.03%
DOR - Doors > DOR - Other	\$2,405.66	1.63%
DOR - Doors > DOR - Panel Doors	\$1,538.14	1.04%
DRY - Drywall > DRY - Ceilings & Walls	\$408.71	0.28%
DRY - Drywall > DRY - Labor, Minimum Charge & Bid Items	\$29.29	0.02%
ELE - Electrical > ELE - Fans	\$210.76	0.14%
ELE - Electrical > ELE - Labor, Minimum Charge & Bid Items	\$0.00	0.00%
FCO - Floor Covering > FCO - Ceramic Tile	\$1,302.05	0.88%
FCO - Floor Covering > FCO - Vinyl	\$893.96	0.60%
FCO - Floor Covering > FCO - Wood	\$46,723.51	31.56%
FEE - Permits and Fees	\$0.00	0.00%
FNC - Finish Carpentry & Trimwork > FNC - Other	\$70.45	0.05%
FNC - Finish Carpentry & Trimwork > FNC - Shelving	\$331.84	0.22%
FNC - Finish Carpentry & Trimwork > FNC - Trims & Moldings	\$2,593.95	1.75%
FRM - Framing & Rough Carpentry > FRM - Underlayments	\$274.37	0.19%
HVC - Heat, Vent & Air Conditioning > HVC - Labor, Minimum Charge & Bid Items	\$31,218.23	21.09%
HVC - Heat, Vent & Air Conditioning > HVC - Radiator	\$104.70	0.07%
LIT - Light Fixtures	\$626.43	0.42%
PLA - Plaster & Lath > PLA - Walls & Ceilings	\$18,472.60	12.48%
PLM - Plumbing > PLM - Bathtubs	\$823.18	0.56%
PLM - Plumbing > PLM - Faucets	\$179.50	0.12%
PLM - Plumbing > PLM - Other	\$52.66	0.04%
PLM - Plumbing > PLM - Sinks	\$655.77	0.44%
PLM - Plumbing > PLM - Toilets & Bidets	\$687.55	0.46%
PNL - Paneling & Wood Wall Finishes	\$972.07	0.66%
PNT - Painting > PNT - Ceilings, Floors & Walls	\$11,982.53	8.09%
PNT - Painting > PNT - Doors	\$319.62	0.22%
PNT - Painting > PNT - Mask & Protection	\$151.42	0.10%
PNT - Painting > PNT - Masonry	\$1,587.54	1.07%
PNT - Painting > PNT - Other	\$79.56	0.05%
PNT - Painting > PNT - Stairs & Railings	\$2,087.68	1.41%
PNT - Painting > PNT - Trims & Moldings	\$7,530.56	5.09%
TBA - Toilet & Bath Accessories	\$209.58	0.14%
TIL - Tile	\$4,118.07	2.78%
WDW - Windows > WDW - Treatments	\$1,226.16	0.83%
Total, all categories	\$148,026.38	100.00%

Recap by Coverage

	Total Cost	Percentage
Building	\$148,026.38	100.00%
Total, all coverages	\$148,026.38	100.00%



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: [Structure](#)

[Claim #061004792, Jeff Stamm](#)

 Completed



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure

Claim #061004792, Jeff Stamm

 Completed

MATERIALS	Quantity	Purchase Qty	Total
Base Molding, Stain Grade, Over 3" - Up to 6" (Replace)	28.81 LF	n/a	\$133.39
Base Molding, Up to 6" (Prime & Paint)	369.82 LF	n/a	\$51.75
Base Molding, Up to 6" (Stain & Finish)	249.58 LF	n/a	\$67.40
Base Shoe (Prime & Paint)	369.82 LF	n/a	\$14.78
Base Shoe (Stain & Finish)	211.46 LF	n/a	\$29.61
Base Shoe, Paint Grade (Rem/Reset)	369.82 LF	n/a	\$25.89
Base Shoe, Stain Grade (Rem/Reset)	222.40 LF	n/a	\$4.45
Base Shoe, Stain Grade (Replace)	28.81 LF	n/a	\$36.02
Bathtub, Cast-Iron, Good (Rem/Reset)	2 EA	n/a	\$4.30
Brick Wall (Prime & Paint)	1,142.11 SF	n/a	\$456.85
Bullnose/Accent Tile, Good (Replace)	16.60 LF	n/a	\$149.73
Cabinet, Base, Good, LF (Replace)	4.00 LF	n/a	\$701.96
Cabinet, Full Height, Very Good, LF (Replace)	8.19 LF	n/a	\$1,917.44
Cabinet, Wall, Good, LF (Replace)	2.00 LF	n/a	\$187.68
Casing (Prime & Paint)	719.65 LF	n/a	\$93.57
Casing (Stain & Finish)	543.74 LF	n/a	\$146.81
Ceramic Soap Dish (Replace)	2 EA	n/a	\$36.74
Ceramic Towel Bar (Replace)	1 EA	n/a	\$29.72
Ceramic/Porcelain Tile, 4"x4", Wall, Good (Replace)	215.92 SF	n/a	\$665.04
Chair Rail (Stain & Finish)	15.02 LF	n/a	\$3.00
Concrete Floor (Prime & Paint)	833.82 SF	n/a	\$250.14
Countertop, Solid-Surface, Good, SF (Replace)	8.00 SF	n/a	\$642.72
Crown Molding, Over 6" (Stain & Finish)	78.16 LF	n/a	\$65.65
Crown Molding, Stain Grade, Over 6" (Rem/Reset)	78.16 LF	n/a	\$3.91
Crown Molding, Up to 6" (Prime & Paint)	277.58 LF	n/a	\$27.75
Crown Molding, Up to 6" (Stain & Finish)	110.93 LF	n/a	\$22.19
Drywall Tape/Joint Repair	29.92 LF	n/a	\$7.78
Drywall, 5/8", Taped, Ceilings (Replace)	42.24 SF	n/a	\$24.92
Drywall/Plaster Ceiling (Paint, 2 Coats)	1,000.72 SF	n/a	\$300.24
Drywall/Plaster Ceiling (Prime & Paint)	1,332.73 SF	n/a	\$399.82
Drywall/Plaster Wall (Paint, 2 Coats)	2,005.59 SF	n/a	\$601.71
Drywall/Plaster Wall (Prime & Paint)	2,770.67 SF	n/a	\$831.21
Dumpster, 10 Yard	1 EA	n/a	\$532.15
Exhaust Fan, w/ Light, Good (Replace)	1 EA	n/a	\$132.79
Faucet & Showerhead, Double-Handle, Good (Rem/Reset)	1 EA	n/a	\$0.34
Final Clean, Per SF (Clean)	3,142.69 SF	n/a	\$157.13
HVACi Report Boiler System Replacement Quote	1 EA	n/a	\$20,849.44
Interior Door, Panel (Stain & Finish)	2 EA	n/a	\$12.06
Interior Door, Panel, Glass, Double (Prime & Paint)	1 EA	n/a	\$7.99
Interior Door, Panel, Glass, Double (Stain & Finish)	1 EA	n/a	\$9.63
Interior Door, Pre-hung, French, Double, Good (Replace)	2 EA	n/a	\$1,903.46
Interior Door, Pre-hung, Oak, SC, 4 Panel (Rem/Reset)	1 EA	n/a	\$0.51



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure Claim #061004792, Jeff Stamm

Completed

Interior Door, Pre-hung, Oak, SC, 4 Panel (Replace)	2 EA	n/a	\$964.30
Interior Door, Pre-hung, Oak, SC, Flush (Replace)	1 EA	n/a	\$174.12
Lath, Wood, Ceilings (Replace)	529.68 SF	n/a	\$1,101.74
Lath, Wood, Walls (Replace)	1,384.48 SF	n/a	\$2,879.72
Light Fixture, Ceiling, Good (Replace)	3 EA	n/a	\$145.80
Light Fixture, Wall, Good (Replace)	1 EA	n/a	\$106.07
Mask & Prep For Painting, LF	112.16 LF	n/a	\$83.00
Medicine Cabinet, Good (Replace)	1 EA	n/a	\$104.31
Minimum Charge, Drywall, 1 Trip	1 LS	n/a	\$23.30
Minimum Charge, HVAC	1 LS	n/a	\$22.40
Paneling, Oak, 1/4" (Replace)	183.82 SF	n/a	\$534.92
Paneling, Wall (Prime & Paint)	159.92 SF	n/a	\$47.98
Plaster, 2 Coats, w/o Lath, Walls (Replace)	282.12 SF	n/a	\$234.15
Plaster, 3 Coats, w/o Lath, Ceilings (Replace)	514.54 SF	n/a	\$658.61
Plaster, 3 Coats, w/o Lath, Walls (Replace)	840.35 SF	n/a	\$1,075.65
Plaster, Thin Coat, w/o Lath (Replace)	29.75 SF	n/a	\$4.17
Quarter Round (Stain & Finish)	38.12 LF	n/a	\$10.30
Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	1,558.04 SF	n/a	\$1,589.20
Shelf, Wood, 1"x8" (Replace)	18.90 LF	n/a	\$62.56
Shelving (Prime & Paint)	18.00 LF	n/a	\$10.80
Stair Riser, 4' (Prime & Paint)	28 EA	n/a	\$33.88
Stair Stringer (Prime & Paint)	28.00 LF	n/a	\$13.72
Stair Tread, 4' (Prime & Paint)	42 EA	n/a	\$91.56
Toilet, One-Piece, Good (Rem/Reset)	2 EA	n/a	\$6.36
Toilet, One-Piece, Good (Reset)	1 EA	n/a	\$3.18
Underlayment, Cement Board, 1/2" (Replace)	224.07 SF	n/a	\$389.88
Underlayment, OSB, 1/2" (Replace)	190.53 SF	n/a	\$108.61
Vinyl Floor Tile, Very Good (Replace)	179.15 SF	n/a	\$517.74
Wood Floor (Prime & Paint)	463.11 SF	n/a	\$138.93
Wood Floor, Oak, 2-1/4", #1 Common (Replace)	2,160.05 SF	n/a	\$10,346.63
Wood Floor, Underlayment, Felt (Replace)	2,160.05 SF	n/a	\$259.20
			\$53,282.46

LABOR	Total	Rate	Total
1 CARPENTER	~13.30 hrs	\$108.58	\$1,444.58
1 CLEANING LABORER	~25.10 hrs	\$56.95	\$1,445.67
1 DRYWALLER	~3.93 hrs	\$95.50	\$376.01
1 DRYWALLER (minimum charge)	~4.00 hrs	\$95.50	\$5.99
1 ELECTRICIAN	~3.30 hrs	\$116.96	\$387.37
1 FINISH CARPENTER	~43.15 hrs	\$121.45	\$5,237.94
1 HVAC TECHNICIAN	~83.56 hrs	\$106.28	\$8,879.70
1 HVAC TECHNICIAN (minimum charge)	~4.00 hrs	\$106.28	\$320.42
1 LABORER	~85.30 hrs	\$57.17	\$4,863.76



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure Claim #061004792, Jeff Stamm

Completed

1 PAINTER	~260.97 hrs	\$76.30	\$19,916.58
1 PLASTERER	~129.39 hrs	\$94.90	\$12,275.43
1 PLUMBER	~21.07 hrs	\$110.66	\$2,331.82
1 TILE & 1 LBR	~34.55 hrs	\$78.30	\$2,705.47
1 TILESETTER	~8.16 hrs	\$99.42	\$811.32
1 WATER REMEDIATION TECHNICIAN	~7.50 hrs	\$87.81	\$658.58
COUNTERTOP INSTALLER	~2.02 hrs	\$115.40	\$232.64
FLOORING INSTALLER	~4.12 hrs	\$91.44	\$376.22
HARDWOOD FLOOR INSTALLER	~257.84 hrs	\$115.40	\$29,761.67
INTERIOR FINISHES INSTALLER	~1.44 hrs	\$92.44	\$133.11
~992.70 hrs			\$92,164.28

EQUIPMENT	Quantity	Total
Final Clean, Per SF (Clean)	3,142.69 SF	\$31.45
HVACi Report Boiler System Replacement Quote	1 EA	\$1,250.97
Plaster, 2 Coats, w/o Lath, Walls (Replace)	282.12 SF	\$28.21
Plaster, 3 Coats, w/o Lath, Ceilings (Replace)	514.54 SF	\$82.33
Plaster, 3 Coats, w/o Lath, Walls (Replace)	840.35 SF	\$109.25
Plaster, Thin Coat, w/o Lath (Replace)	29.75 SF	\$2.38
Sand, Stain, & Finish, Wood Floor, Polyurethane, 2 Coats, Stain, 1 Coat, Dustless	1,558.04 SF	\$1,075.05
		\$2,579.64



Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: [Structure](#)

[Claim #061004792, Jeff Stamm](#)

 Completed

Total Materials:	\$53,282.46
Total Labor:	\$92,164.28
Total Equipment:	\$2,579.64
Subtotal:	\$148,026.38
State 6.000% (applies to materials only):	\$1,946.00
Add 10.00% overhead:	\$14,802.85
Add 10.00% profit:	\$14,802.85
Estimate Subtotal:	\$179,578.08
Total Coverage Building (\$776,800.00 limit):	\$179,578.08
Net Coverage Building:	\$179,578.08
Estimate Total:	\$179,578.08

Finalization